

NSE7_OTS-6.4^{Q&As}

Fortinet NSE 7 - OT Security 6.4

Pass Fortinet NSE7_OTS-6.4 Exam with 100% Guarantee

Free Download Real Questions & Answers PDF and VCE file from:

https://www.pass4itsure.com/nse7 ots-6-4.html

100% Passing Guarantee 100% Money Back Assurance

Following Questions and Answers are all new published by Fortinet
Official Exam Center


- Instant Download After Purchase
- 100% Money Back Guarantee
- 365 Days Free Update
- 800,000+ Satisfied Customers





QUESTION 1

Refer to the exhibit.

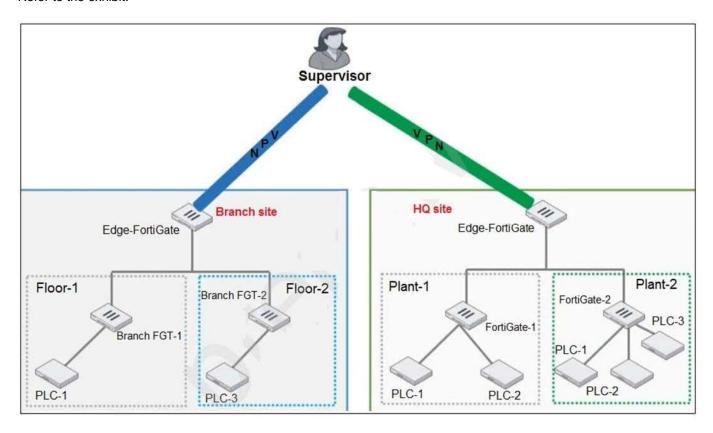

You need to configure VPN user access for supervisors at the breach and HQ sites using the same soft FortiToken. Each site has a FortiGate VPN gateway.

What must you do to achieve this objective?

- A. You must use a FortiAuthenticator.
- B. You must register the same FortiToken on more than one FortiGate.
- C. You must use the user self-registration server.
- D. You must use a third-party RADIUS OTP server.

Correct Answer: A

QUESTION 2

An OT architect has deployed a Layer 2 switch in the OT network at Level 1 the Purdue model-process control. The purpose of the Layer 2 switch is to segment traffic between PLC1 and PLC2 with two VLANs. All the traffic between PLC1 and PLC2 must first flow through the Layer 2 switch and then through the FortiGate device in the Level 2 supervisory control network.

What statement about the traffic between PLC1 and PLC2 is true?

https://www.pass4itsure.com/nse7_ots-6-4.html 2024 Latest pass4itsure NSE7_OTS-6.4 PDF and VCE dumps Download

- A. The Layer 2 switch rewrites VLAN tags before sending traffic to the FortiGate device.
- B. The Layer 2 switches routes any traffic to the FortiGate device through an Ethernet link.
- C. PLC1 and PLC2 traffic must flow through the Layer-2 switch trunk link to the FortiGate device.
- D. In order to communicate, PLC1 must be in the same VLAN as PLC2.

Correct Answer: C

QUESTION 3

An OT supervisor needs to protect their network by implementing security with an industrial signature database on the FortiGate device.

Which statement about the industrial signature database on FortiGate is true?

- A. A supervisor must purchase an industrial signature database and import it to the FortiGate.
- B. An administrator must create their own database using custom signatures.
- C. By default, the industrial database is enabled.
- D. A supervisor can enable it through the FortiGate CLI.

Correct Answer: D

QUESTION 4

Refer to the exhibit.

Active Rules × Windows Installed Patches ×		Router/Switch Image Distribution ×			
Back Export				H 5 1/1	
Device Name	Device Type Vendor	Device Type Model	Device Hardware Model	Device Image File	Count
SJ-QA-A-IOS-JunOffice	Cisco	ios	1760	C1700-advsecurityk9- mz.123-8.T4.bin	1
SJ-Main-Cat6500	Cisco	IOS	WS-C6509	s72033- advipservicesk9_wan- mz.122-33.SXI1.bin	1
ph-network-3560_1	Cisco	IOS	WS-C3560G-48PS-S	c3560-advipservicesk9- mz.122-25.SEE4.bin	1

An OT administrator ran a report to identify device inventory in an OT network. Based on the report results, which report was run?

- A. A FortiSIEM CMDB report
- B. A FortiAnalyzer device report



https://www.pass4itsure.com/nse7_ots-6-4.html

2024 Latest pass4itsure NSE7_OTS-6.4 PDF and VCE dumps Download

- C. A FortiSIEM incident report
- D. A FortiSIEM analytics report

Correct Answer: A

QUESTION 5

Which three criteria can a FortiGate device use to look for a matching firewall policy to process traffic? (Choose three.)

- A. Services defined in the firewall policy.
- B. Source defined as internet services in the firewall policy
- C. Lowest to highest policy ID number
- D. Destination defined as internet services in the firewall policy
- E. Highest to lowest priority defined in the firewall policy

Correct Answer: ABD

NSE7 OTS-6.4 PDF Dumps

NSE7 OTS-6.4 Study Guide NSE7 OTS-6.4 Exam Questions