



NSE7_SAC-6.2^{Q&As}

Fortinet NSE 7 - Secure Access 6.2

Pass Fortinet NSE7_SAC-6.2 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

https://www.pass4itsure.com/nse7_sac-6-2.html

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Fortinet
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers



**QUESTION 1**

Default VLANs are created on FortiGate when the FortiLink interface is created. By default, which VLAN is set as Allowed VLANs on all FortiSwitch ports?


- A. Sniffer VLAN
- B. Camera VLAN
- C. Quarantine VLAN
- D. Voice VLAN

Correct Answer: A

QUESTION 2

Refer to the exhibit.

Examine the network topology shown in the exhibit.

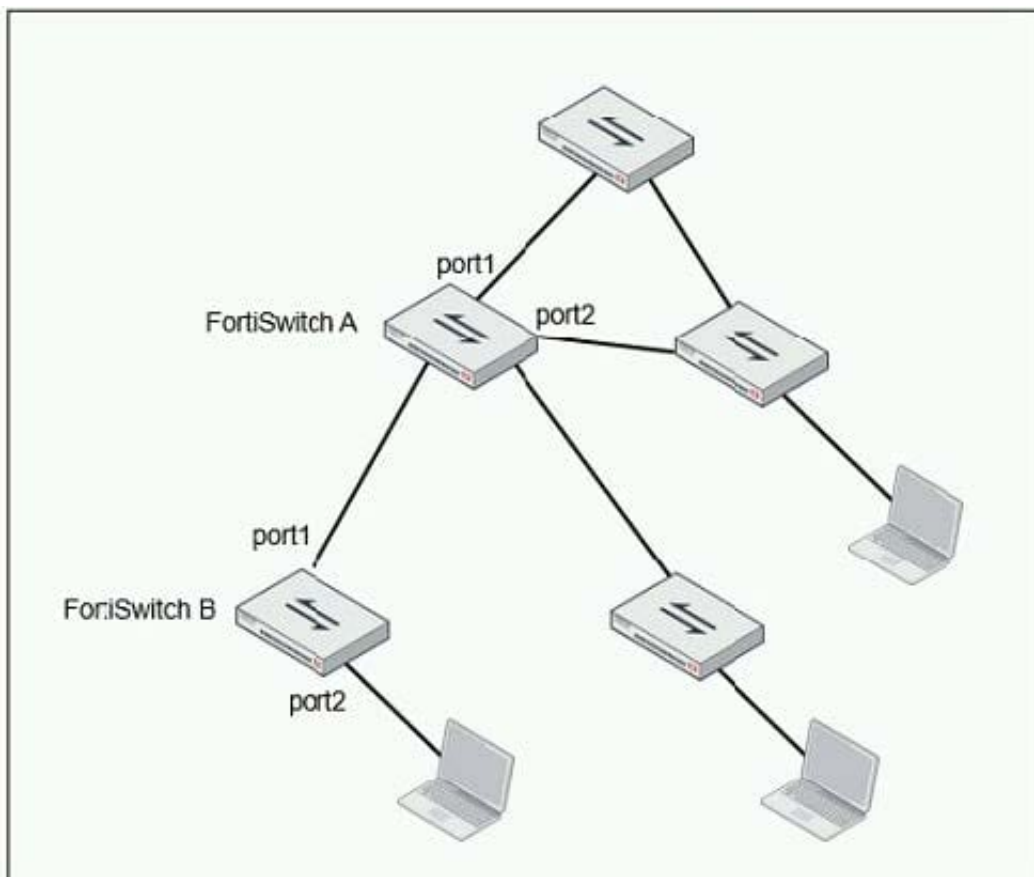

Which port should have root guard enabled?

- A. FortiSwitch A, port2



- B. FortiSwitch A, port1
- C. FortiSwitch B, port1
- D. FortiSwitch B, port2

Correct Answer: A

Reference: <https://docs.fortinet.com/document/fortiswitch/6.4.2/administration-guide/364614/spanningtree-protocol>

QUESTION 3

Refer to the exhibit.

Examine the configuration of the FortiSwitch security policy profile.

Edit FortiSwitch Security Policy

Name	Students	
Security mode	Port-based	MAC-based
User groups	Wired-Users	
Guest VLAN	<input checked="" type="checkbox"/>	guest
Guest authentication delay	120	second(s)
Authentication fail VLAN	<input checked="" type="checkbox"/>	auth-fail
MAC authentication bypass	<input checked="" type="checkbox"/>	
EAP pass-through	<input checked="" type="checkbox"/>	
Override RADIUS timeout	<input type="checkbox"/>	

If the security profile shown in the exhibit is assigned on the FortiSwitch port for 802.1X.port authentication, which statement is correct?

- A. Host machines that do support 802.1X authentication, but have failed authentication, will be assigned the guest VLAN.
- B. All unauthenticated users will be assigned the auth-fail VLAN.
- C. Authenticated users that are part of the wired-users group will be assigned the guest VLAN.
- D. Host machines that do not support 802.1X authentication will be assigned the guest VLAN.

Correct Answer: C

**QUESTION 4**

Refer to the exhibit.

```
FortiGate # diagnose switch-controller switch-info 802.1X
Managed Switch : S224EPTF18001736

port2 : Mode: port-based (mac-by-pass disable)
Link: Link up
Port State: unauthorized: ( )
Dynamic Authorized Vlan : 0
EAP pass-through mode : Enable
Quarantine VLAN (4093) detection : Enable
Native Vlan : 10
Allowed Vlan list: 10,4093
Untagged Vlan list: 4093
Guest VLAN :
Auth-Fail Vlan :

Sessions info:
00:09:0f:02:02:02      Type=802.1x,,state=AUTHENTICATING,etime=0,eap_cnt=0 params:reAuth=3600
```

A host machine connected to port2 on FortiSwitch cannot connect to the network. All ports on FortiSwitch are assigned a security policy to enforce 802.1X port authentication. While troubleshooting the issue, the administrator runs the debug command and obtains the output shown in the exhibit.

Which two scenarios are the likely cause of this issue? (Choose two.)

- A. The host machine is not configured for 802.1X port authentication.
- B. The host machine does not support 802. 1X authentication.
- C. The host machine is quarantined due to a security incident.
- D. The host machine is configured with wrong VLAN ID.

Correct Answer: AB

Reference: <https://kb.fortinet.com/kb/documentLink.do?externalID=FD46428>

QUESTION 5

Which two EAP methods can use MSCHAPV2 for client authentication? (Choose two.)

- A. PEAP
- B. EAP-TTLS
- C. EAP-TLS
- D. EAP-GTC

Correct Answer: AC



Reference: https://help.fortinet.com/fauth/3-3/Content/FortiAuthenticator%203_3%20Admin%20Guide/500/501_EAP.htm

[Latest NSE7_SAC-6.2 Dumps](#)

[NSE7_SAC-6.2 Practice Test](#)

[NSE7_SAC-6.2 Braindumps](#)