

Exam : E20-651

Title : Networked Storage-SAB
Installation and
Troubleshooting Exam

Version : DEMO

www.Pass4itSure.com

1. Which tools are used in the management of the Connectrix Switch?

- A. Serial Connect, SSH, Embedded Web Server, Web Tools and Connectrix Manager.
- B. Telnet, Embedded Web Server, Web Tools Serial Connect and Connectrix Manager.
- C. Embedded Web Server, Parallel Connect, SSH, Web Tools and Connectrix Manager.
- D. Parallel Connect, Telnet, Embedded Web Server, Web Tools and Connectrix Manager.

Answer: B

2. Which command will show the version of PowerPath being run?

- A. powermt version
- B. powermt show version
- C. powermt display version
- D. powermt check_registration

Answer: A

3. How many ports are there in a M-Series ASIC?

- A. 2
- B. 3
- C. 4
- D. 8

Answer: D


4. What addressing mode is used in Windows and Sun with Fibre Channel?

- A. LUN Addressing
- B. Logical Addressing
- C. Volume Set Addressing
- D. Peripheral Device Addressing

Answer: D

5. Click the Exhibit button.

What do the lights on the WWN bezel of the Connectrix 12000B indicate?

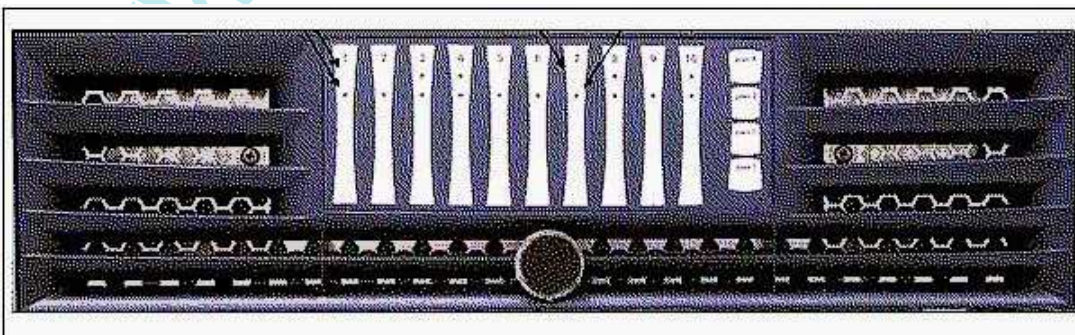

- A. power LED / status LED

- B. activity LED / power LED
- C. wwn LED / cabinet temperature
- D. fan speed indicator / temp indicator

Answer: A

6. Which [2] of the current Connectrix MDS products support the IPS Line Module?

- A. 9120
- B. 9140
- C. 9216
- D. 9509

Answer: CD

7. Click the Exhibit button.

What command would you use to display this information?

```

MDS_9509_Group2#
VSAN 1
The local switch is the Principal Switch.

Local switch run time information:
  State: Stable
  Local switch WWN:      20:01:00:0c:85:72:89:01
  Running fabric name:  20:01:00:0c:85:72:89:01
  Running priority:     2
  Current domain ID:    0x69(105)

Local switch configuration information:
  State: Enabled
  FCID persistence:    Disabled
  Auto-reconfiguration: Disabled
  Contiguous-allocation: Disabled
  Configured fabric name: 20:01:00:05:30:00:28:df
  Configured priority:  128
  Configured domain ID: 0x00(0) (preferred)

Principal switch run time information:
  Running priority:     2

Interface          Role          RCF-reject
-----
port-channel 3     Downstream    Disabled
    
```

- A. show vaan
- B. show zone
- C. show interface
- D. show fcdomain

Answer: D

8. What happens when the SAN Manager host discovers the SAN?

- A. New records are added to the VCMDB.
- B. Directly connected switches are rebooted.

- C. Zoning information is added to FibreZone database.
- D. New Production Hosts are connected to the switch.

Answer: C

9. How many Zone Sets can be Activated per Fabric using SAN Manager?

- A. 1
- B. 2
- C. 3
- D. 4

Answer: A

10. Which package must be installed on the Connectrix Service Processor so that SAN Manager can perform zoning on McData switches?

- A. SAN Manager
- B. Internet Explorer
- C. FibreZoneBridge
- D. Solutions Enabler

Answer: C

11. Which Protocol is characterized by distance, connectivity and speed?

- A. SCSI
- B. Fibre
- C. Escon
- D. Bus & Tag

Answer: B

12. Which four [4] client host types can be used with the Java based support on Connectrix Manager?

- A. AIX
- B. Sun C.
- Linux D.
- HP-UX E.
- TRU64
- F. Windows
- G. Mainframe

Answer: ABDF

13. How many Connectrix Directors/switches can be managed with a single Service Processor with Connectrix Manager?

- A. 4

- B. 28
- C. 38
- D. 48

Answer: D

14. What is the Default ip address for a DS-16b2?

- A. none
- B. 10.255.0.1
- C. 10.77.77.77
- D. 192.168.1.1

Answer: C

15. Your customer is using EMC Solutions Enabler 5.1. What is the recommended volume masking to discover HBAs in this environment?

- A. symmask discover hba B.
- symmask discover hbas C.
- symmaskd discover hba
- D. symmaskdb discover hbas

Answer: A

16. Which M-Series switch also supports Arbitrated Loop logins?

- A. ED64M
- B. ED1032
- C. DS16M2
- D. DS24M2

Answer: D

17. Which two [2] tasks must be performed on the CLARiiON before configuring PowerPath?

- A. Select PowerPath
- B. Create Storage groups C.
- Configure Volume Logix D.
- Set the failover mode to 1
- E. Configure Array Compath

Answer: DE

18. Which command displays the current firmware version in a B-Series device?

- A. version
- B. cfgshow
- C. vershow

D. shoversion

Answer: A

19. Which command will reconfigure PowerPath?

A. powermt config

B. powermt set mode

C. powermt set policy

D. powermt set config

Answer: A

20. Select three [3] Connectrix MDS EXEC commands.

A. Show

B. Config

C. Cfgdisable

D. Traceroute

E. Configshow

F. Switchshow

Answer: ABD

www.Pass4itSure.com

Trying our product !

- ★ **100%** Guaranteed Success
- ★ **100%** Money Back Guarantee
- ★ **365 Days** Free Update
- ★ **Instant Download** After Purchase
- ★ **24x7** Customer Support
- ★ Average **99.9%** Success Rate
- ★ More than **69,000** Satisfied Customers Worldwide
- ★ Multi-Platform capabilities - **Windows, Mac, Android, iPhone, iPod, iPad, Kindle**

Need Help

Please provide as much detail as possible so we can best assist you.

To update a previously submitted ticket:



Submit A Ticket

One Year Free Update



Free update is available within One Year after your purchase. After One Year, you will get 50% discounts for updating. And we are proud to boast a 24/7 efficient Customer Support system via Email.



Money Back Guarantee

To ensure that you are spending on quality products, we provide 100% money back guarantee for 30 days from the date of purchase.



Security & Privacy

We respect customer privacy. We use McAfee's security service to provide you with utmost security for your personal information & peace of mind.

Guarantee & Policy | Privacy & Policy | Terms & Conditions

Any charges made through this site will appear as Global Simulators Limited.

All trademarks are the property of their respective owners.

Copyright © 2004-2014, All Rights Reserved.