



# DES-1241<sup>Q&As</sup>

Specialist - Platform Engineer, PowerStore

## Pass Dell DES-1241 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass4itsure.com/des-1241.html>

100% Passing Guarantee  
100% Money Back Assurance

Following Questions and Answers are all new published by Dell Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





### QUESTION 1

How is a defective DIMM displayed in Dell EMC PowerStore Manager?

- A. Orange with an empty state
- B. Blue with a faulted state
- C. Orange with a faulted state
- D. Blue with an empty state

Correct Answer: C

---

### QUESTION 2

For what is the "svc\_container\_mgmt status CP" command used?

- A. Clears the Control Path audit log
- B. Resets the Data Path root access
- C. Checks the status of the Control Path
- D. Checks the status of the Data Path

Correct Answer: C

Reference: <http://webcache.googleusercontent.com/search?q=cache:ZhvW4-xt2TEJ:dunmer.net/guides/powerstore-implementation/PowerStore%252BBasic%252BTroubleshooting%252BExternal%252B-%252BParticipant%252BGuide.pdf+andcd=3andhl=enandct=clnkandgl=pkandclient=ubuntu>

---

### QUESTION 3

Refer to the exhibit.



A Storage Administrator noticed a solid amber LED. What does this mean?

- A. Drive identification on
- B. Drive rebuilding
- C. Power up
- D. Drive faulted

Correct Answer: D

Reference: <https://www.dell.com/support/article/en-pk/sln321266/powerstore-understanding-led-colors-and-states-for-troubleshooting?lang=en>

#### QUESTION 4


What describes Dell EMC PowerStore heat dissipation?

- A. X systems have higher heat dissipation specifics than T systems
- B. Higher model numbered systems have lower heat dissipation specifications than lower model numbered systems
- C. T systems have higher heat dissipation specifics than X systems
- D. Lower model numbered systems have lower heat dissipation specifications than higher model numbered systems

Correct Answer: A

#### QUESTION 5

Refer to the exhibit.

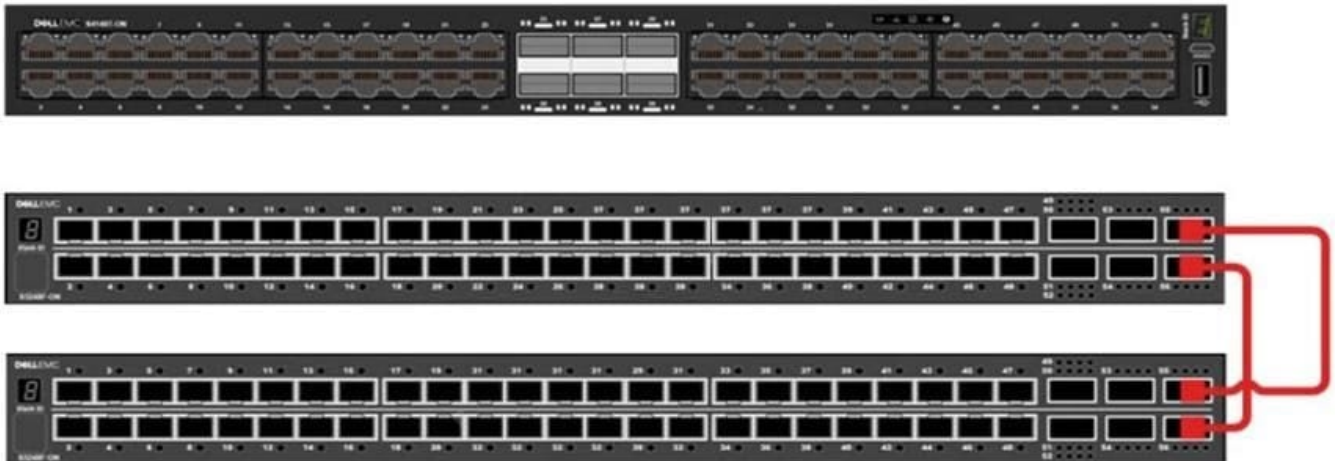

What Dell EMC PowerStore ToR front-end cabling is shown?

- A. OOB Management
- B. VLTi interconnectivity
- C. Core switch uplink
- D. Management and discovery

Correct Answer: B

Reference: <https://www.dell.com/support/manuals/en-pk/powerstore-5000/pwrstrx-ntwkg/configure-virtual-link-trunking-interconnect-vlti?guid=guid-0557f292-11f7-4c2a-a0bc-ec1f3e69c4cb&lang=en-us>

#### QUESTION 6

What is the protocol used for the storage network?

- A. FC
- B. NFS
- C. SMB
- D. iSCSI

Correct Answer: D

Reference: <https://www.dell.com/en-us/collaterals/unauth/white-papers/products/storage/h18149-dell-emc-powerstore-platform-introduction.pdf> (23)

#### QUESTION 7

What safety equipment is critical to have on hand to avoid equipment failure before replacing any components in a Dell EMC PowerStore array?



- A. Maintenance Kit
- B. ESD Kit
- C. Stabilization Kit
- D. Rail Kit

Correct Answer: B

Reference: <https://www.dell.com/support/manuals/en-pk/powerstore-9000t/pwrstr-isg/avoiding-electrostatic-discharge-esd-damage?guid=guid-d94c9c2a-3c04-4951-a8ab-87ba992cc6f6&lang=en-us>

---

### QUESTION 8

```
#(conf-if-eth1/1/1) description "Node A management port"  
#(conf-if-eth1/1/1) switchport access vlan 1  
#(conf-if-eth1/1/1) switchport mode trunk  
#(conf-if-eth1/1/1) switchport trunk allowed vlan 1501  
#(conf-if-eth1/1/1) no shutdown
```

Refer to the exhibit.

What is the result of the network configuration show for a Dell EMC PowerStore T node A management port?

- A. VLAN 1 and VLAN 1501 pass tagged traffic
- B. VLAN 1 passes tagged traffic, VLAN 1501 passes untagged traffic
- C. VLAN 1 passes untagged traffic, VLAN 1501 passes tagged traffic
- D. VLAN 1 and VLAN 1501 pass untagged traffic

Correct Answer: D

---

### QUESTION 9

Which component is hot-swappable?

- A. SFP
- B. Fan
- C. BBU
- D. Expansion IO module

Correct Answer: D

---



Reference: [https://topics-cdn.dell.com/pdf/pwrstr-hwg\\_en-us.pdf](https://topics-cdn.dell.com/pdf/pwrstr-hwg_en-us.pdf) (15)

### QUESTION 10

What is the last step when adding a drive to a Dell EMC PowerStore system?

- A. Verify the new drive is seen
- B. Add the drive to the pool
- C. Backup the keystore
- D. Zero the drive

Correct Answer: A

Reference: <https://www.dell.com/support/manuals/pk/en/pkbsd1/powerstore-9000t/pwrstr-isg/install-a-25-drive?guid=guid-bddae51e-a561-4e84-bc0a-c2e99a43f033andlang=en-us>

### QUESTION 11

DRAG DROP

Match the correct non-disruptive upgrade process step (answer column) with the correct sub-step (match column).

Select and Place:

#### Non-Disruptive Upgrade Process Step

Upgrade
Upload Software OE
Commit
Health Check

#### Sub-step

Receives the package and verifies the signature
Runs in parallel on all appliances and PUHC results can be viewed
Starts with the Master appliance and Waits for ongoing management operations to complete
Delete all images and packages and Mark new version as current

Correct Answer:



### Non-Disruptive Upgrade Process Step


### Sub-step

Commit
Health Check
Upgrade
Upload Software OE

#### QUESTION 12

Under which condition does the Dell EMC PowerStore equipment in the rack require additional stability?

- A. Low temperatures
- B. Unstable humidity
- C. Unstable environments
- D. High temperatures

Correct Answer: C

#### QUESTION 13

A Storage Administrator needs to add drives to a base enclosure of a Dell EMC PowerStore 7000T system. The system currently contains 10 750 GB NVMe SCM drives. Which drive configuration maximizes the base enclosure capacity?

- A. 11 15360 GB NVMe SSD drives in slots 10 - 20
- B. 13 15360 GB NVMe SSD drives in slots 10 - 22
- C. 11 750 GB NVMe SCM drives in slots 10 - 20
- D. 13 750 GB NVMe SCM drives in slots 10 - 22

Correct Answer: C



#### QUESTION 14

What is a step in configuring the ToR data switches for a Dell EMC PowerStore T?

- A. Configure a port for the discovery laptop
- B. Create VLANs for NAS servers
- C. Create VLAN for vMotion networks
- D. Configure ports for management on native VLAN

Correct Answer: D

---

#### QUESTION 15

What guidance must to be considered for Service LAN port access of a Dell EMC PowerStore appliance?

- A. Always connect multiple appliances to the same hub or switch
- B. Never connect multiple appliances to the same hub or switch
- C. Never connect the Service laptop directly to the appliance Service LAN port
- D. Always removed the management port connections on the appliance

Correct Answer: B

Reference: <https://www.dell.com/support/article/en-pk/sln321624/powerstore-ssh-and-powerstore-manager-access-using-the-service-lan-ports?lang=en>

[Latest DES-1241 Dumps](#)

[DES-1241 VCE Dumps](#)

[DES-1241 Practice Test](#)