



DES-4122^{Q&As}

Specialist - Implementation Engineer PowerEdge Version 2.0

Pass EMC DES-4122 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass4itsure.com/des-4122.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by EMC
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers





QUESTION 1

What is a valid password option available from the iDRAC9 Unique ID feature?

- A. Encryption Default
- B. Secure Default
- C. Legacy Generated
- D. Randomly Generated

Correct Answer: D

QUESTION 2

What is the Open Compute Project (OCP) card used for in a Dell EMC PowerEdge server?

- A. Flexibility to choose interconnects
- B. Fixed networking card
- C. Consume a PCIe slot
- D. Provide a hot-swap component

Correct Answer: B

QUESTION 3

What are key values related to systems management when deploying OpenManage Enterprise with Dell EMC PowerEdge servers?

- A. Automate Basic Hardware Element Management Agent-free Management Simple and effective
- B. Simplify Basic Hardware Element Management Agent-free Management
Fee-based license
- C. Simplify Fee-based license Agent-free Management Secure
- D. Simplify Unify Automate Secure

Correct Answer: C

QUESTION 4

What is a systems management console solution optimized for monitoring and managing Dell enterprise and remote office hardware?



- A. SupportAssist Enterprise
- B. iSM
- C. OpenManage Essentials
- D. iDRAC9

Correct Answer: C

QUESTION 5

DRAG DROP

Match each RAID level to its characteristic.

Select and Place:

Level	Characteristic
RAID 10	Highest disk overhead
RAID 5	Failure of one drive affects overall performance
RAID 6	Requires minimum of four drives
RAID 1	Used for high performance databases

Correct Answer:


Level	Characteristic
	RAID 10
	RAID 6
	RAID 1
	RAID 5



QUESTION 6

DRAG DROP

Refer to the exhibit.

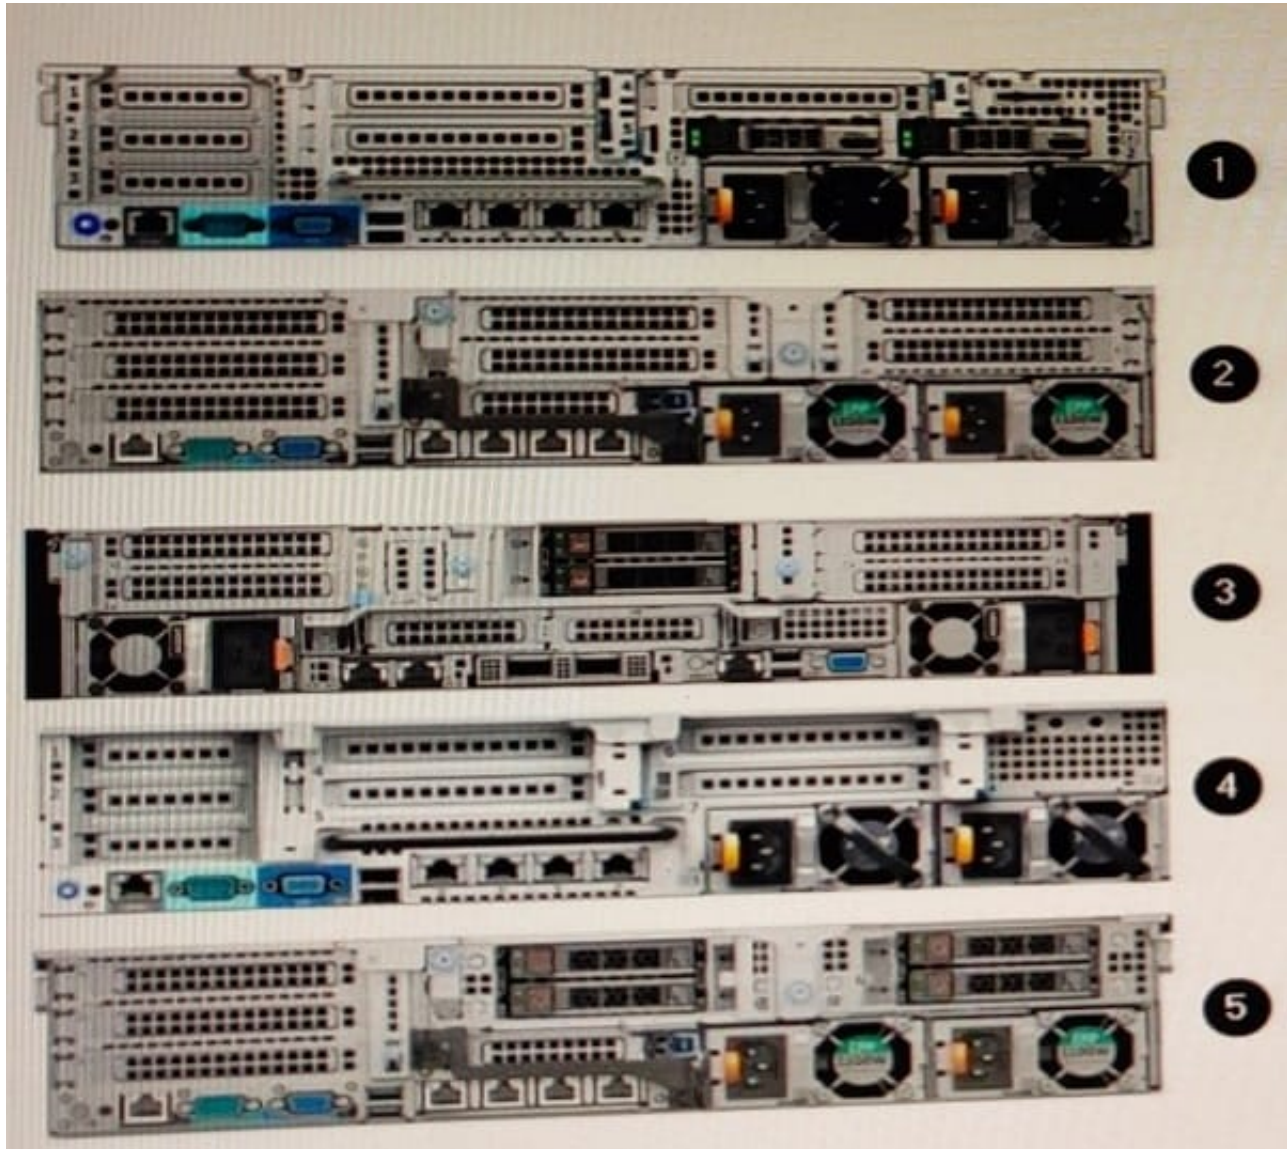

Match each callout to the Dell EMC PowerEdge server model shown.

Select and Place:



Callout	Model
3	R730xd
5	R740
1	R7525
4	R730
2	R740xd

Correct Answer:

Callout	Model
	4
	5
	3
	1
	2

QUESTION 7

Where is the data stored to allow Easy Restore to successfully complete a system board replacement?

- A. NAND Flash module on the disk drive mid plane
- B. IDSDM SD card
- C. vFlash SD card
- D. Serial Flash storage in the server's front panel

Correct Answer: C

**QUESTION 8**

A company that has very specific firmware requirements has acquired Dell EMC PowerEdge servers. Any replaced parts of the type must match the original parts identically. The procedure must be as simple as possible with minimal risk.

What action should a technician take to help accomplish this goal?

- A. Configure servers to access the remote firmware repository
- B. Enable the Match Firmware of Replaced Part setting in the system BIOS
- C. Install and configure a repository manager
- D. Enable the Collect System Inventory On Restart (CSIOR) attribute

Correct Answer: A

QUESTION 9

An engineer needs to upgrade a Dell EMC PowerEdge R440 server from a single PSU to dual PSU configuration. There are unused PSU modules from PowerEdge R430 and R420 servers available, and they have the same wattage ratings.

What should the engineer do to complete the task?

- A. Add the PowerEdge R420 PSU modules to the PowerEdge R440
- B. Order a new PSU specific to the existing PowerEdge R440
- C. Add the PowerEdge R430 PSU modules to the PowerEdge R440
- D. Configure the PowerEdge R440 PSU with 1+1 configuration

Correct Answer: A

QUESTION 10

What is required for iDRAC Direct 2.0 to connect with iDRAC9 interfaces such as RACADM and WSMAN?

- A. Wi-Fi connection
- B. NFC connection
- C. Ethernet cable
- D. Micro-AB USB

Correct Answer: D