HP2-Z30 Q&As

Fast Track - Applying HP FlexNetwork Fundamentals

Pass HP HP2-Z30 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

https://www.pass4itsure.com/hp2-z30.html

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by HP Official Exam Center

QUESTION 1

A network administrator is expanding part of the data center in a hospital network. Three new racks of equipment need to be added, with an HP Comware 5820 series switch at the top of each rack. The Comware 5820 series switch needs to connect back to two core Comware 12500 switches using 10Gb connections. The distance between the three racks and the Comware 12500 switches is approximately 40 meters; however, the network administrator is concerned about electromagnetic and other types of interferences to electrical signals.

Which solutions protect against interference and are cost-effective for this scenario? (Select two.)

A. 10GBase-ZR

B. 10GBase-SR

C. 10GBase-ER

D. 10GBase-LX4

E. 10GBase-T

Correct Answer: BD

QUESTION 2

Which VLAN port type is only supported by HP Comware switches?

A. access

B. voice

C. trunk

D. hybrid

Correct Answer: D

QUESTION 3

Which statement is true about using the RADIUS protocol for AAA functions\\'?

A. Only passwords are encrypted in the RADIUS payload.

B. Digital certificates are used to authenticate the networking devices and AAA server.

C. AAA accounting records can be saved using RADIUS or syslog.

D. RADIUS uses TCP as a transport.

Correct Answer: A

QUESTION 4

A device is connected to an HP Comware hybrid port. Which type of information from the attached device canbe used to assign it to a VLAN?

A. access control list

B. IPX host address

C. LLDP device type

D. protocol

Correct Answer: D

QUESTION 5

Which Layer 2 mechanism should be used to authenticate wireless or wired users before allowing them access to network resources?

A. 802.1X

B. MIMO

C. 802.1Z

D. WPA

Correct Answer: A

QUESTION 6

Which HP Comware command saves the startup configuration file to a TFTP server?

A. startup

B. restore

C. backup

D. copy

Correct Answer: C

Reference:http://www.h3c.com/portal/Technical_Support___Documents/Technical_Docum ents/Switches/H3C_5820X_Series_Switches/Maintenance/Maintenance/H3C_Login_Pass word_Recovery_Manual(V1.01)/(see user level switching password, see user view commands)

QUESTION 7

Which FlexArchitecture component uses Virtual Connect in blade server systems?

A. FlexFabric

B. FlexDataCenter

C. FlexManagement

D. FlexCampus

Correct Answer: A

QUESTION 8

Which statement is true concerning PoE support on HP ProVision and HP Comware switches?

A. Both the IEEE 802.3af and 802.3az power standards are supported.

B. PoE is enabled by default on PoE-capable ports.

C. Lowered-number ports, by default, have higher priority for Power requests.

D. SNMP is used to determine power requirements of a connected devices.

Correct Answer: B

QUESTION 9

Which configuration tool do HP Provision switches support that HP Comware switches do not support?

A. menu system

B. auto configuration tool

C. web-based

D. SNMP

Correct Answer: C

QUESTION 10

Which statement is true about the management of HP ProVision and Comware switches?

A. Telnet SSH are enabled by default on Comware switches.

B. Telnet is enabled but SSH is disabled on ProVision switches.

C. Comware switches, by default, store usernames and passwords in a separate configuration file.

D. ProVision switches, by default, store usernames and passwords in a separate configuration file.

Correct Answer: D

QUESTION 11

Which console cable is used on an HP Comware switch?

A. cross-over

B. rollover

C. USB

D. straight-through

Correct Answer: B

QUESTION 12

A network administrator acquires a new HP Comware switch from HP with the factory default settings. The network administrator logs into the console port and configures the following information: user-interface aux0 quit super password level 0 simple hp0 super password level 1 simple hpl super password level 2 simple hp2 super password level 3 simple hp3 What happens the next time the network administrator logs into the console?

A. The network administrator is immediately taken to level 3 with no password prompted.

B. The network administrator must enter a password of hp3.

C. The network administrator must perform the password recovery procedure because it was incorrectly configured.

D. The network administrator must enter a password of hp0.

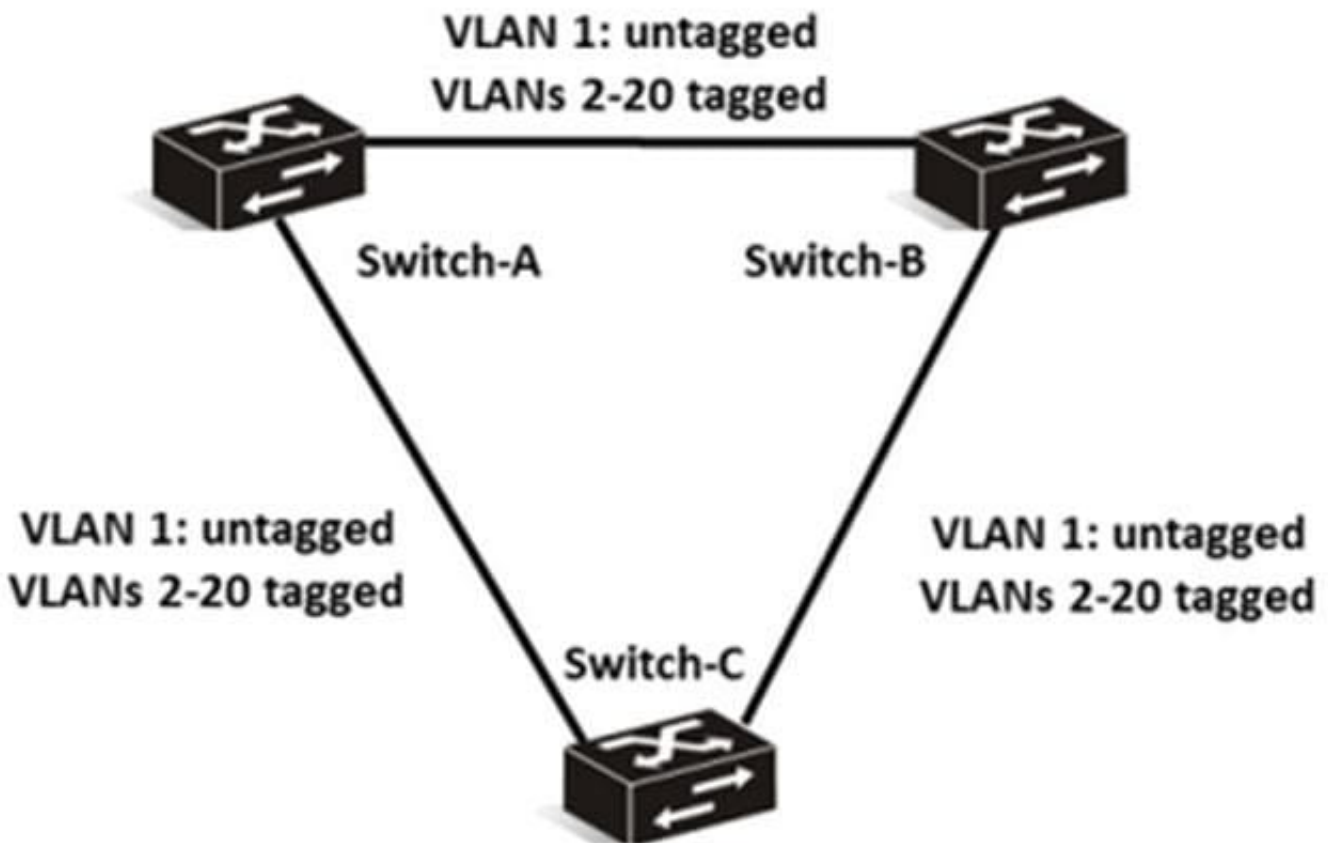Correct Answer: B

QUESTION 13

Which 802.1X component seeks authentication?

A. processee

B. supplicant

C. authenticatee

D. authenticator

Correct Answer: B

QUESTION 14

Refer to the network exhibit.

VLAN 1: untagged
VLANs 2-20 tagged

Switch-A   Switch-B

VLAN 1: untagged   **VLAN 1: untagged**
VLANs 2-20 tagged   **VLANs 2-20 tagged**

Switch-C

A network administrator has created a Layer 2 network based on the design shown in the exhibit. Switch-A and Switch-B are distribution layer switches. Switch-C is an access layer switch. All switches are HP Comware switches.

What is the best spanning tree solution for load sharing on uplinks in this environment?

A. STP

B. MSTP

C. RSTP

D. distributed trunking

Correct Answer: B

QUESTION 15

Which statement is correct about IRF?

A. Identical models of switches must be used in the same IRF domain.

B. Logical IRF port one on a switch must be connected to IRF port two on a second switch.

C. MSTP is used to remove loops within an IRF domain.

D. LACP is used to build IRF port connections between switches.

Correct Answer: B

Latest HP2-Z30 Dumps   HP2-Z30 Practice Test   HP2-Z30 Exam Questions