



# JN0-363<sup>Q&As</sup>

Service Provider Routing and Switching Specialist (JNCIS-SP)

## Pass Juniper JN0-363 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass4itsure.com/jn0-363.html>

100% Passing Guarantee  
100% Money Back Assurance


Following Questions and Answers are all new published by Juniper  
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



**QUESTION 1**

LSI1 A AS 65501 ISPB AS 65502 Advertised Prefixes: 172.20.0.0/24 172.20.20.0/24 172.20.21.0/24 Advertised Prefixes: 172.20.0.0/24 172.20.1.0/24

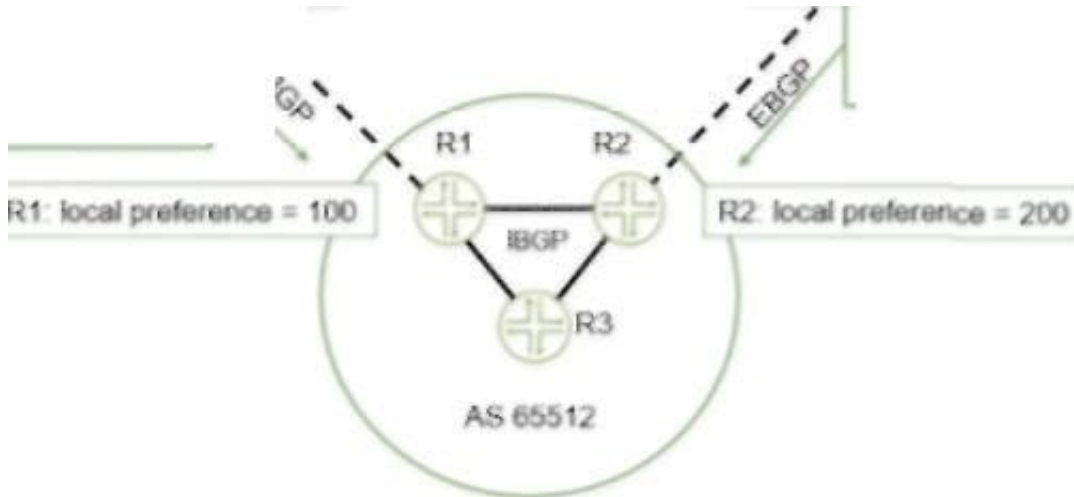


Referring to the exhibit, which two statements are correct? (Choose two.)

- A. Devices in AS 65512 will prefer ISP A for traffic destined to the 172.20.21.0/24 network.
- B. Devices In AS 65512 will prefer ISP A for traffic destined to the 172.20.0.0/24 network.
- C. Devices in AS 65512 will prefer ISP B for traffic destined to the 172.20.21.0/24 network.
- D. Devices In AS 65512 will prefer ISP B for traffic destined to the 172.20.0.0/24 network.

Correct Answer: C

**QUESTION 2**

Exhibit

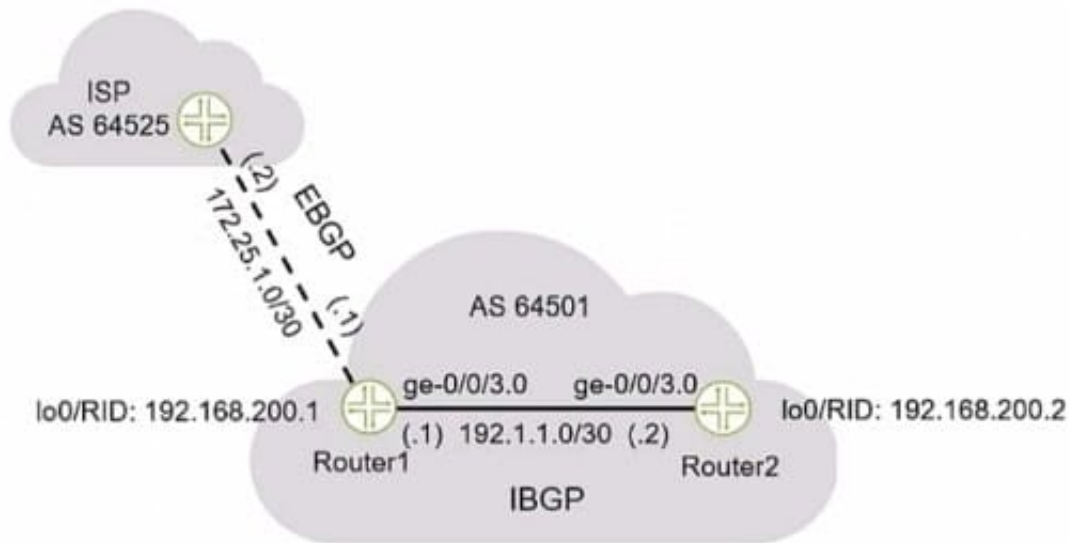

```
[edit]
user@Router1# show protocols bgp
group External {
  peer-as 64525;
  neighbor 172.25.1.2;
}
```

Referring to the exhibit, what must be included in the Router1 configuration when establishing an EBGP session with the ISP?

- A. A local address must be specified.
- B. A local AS must be specified.
- C. The BGP session type internal must be specified.
- D. The BGP session type external must be specified.

Correct Answer: A

### QUESTION 3

Which statement is correct about IS-IS?

- A. IS-IS is a distance vector routing protocol.
- B. IS-IS is a path vector routing protocol.
- C. IS-IS is a link-state routing protocol.
- D. IS-IS is a classful routing protocol.

Correct Answer: C



#### QUESTION 4


Which two interface types are used as tunnel endpoints? (Choose two.)

- A. ae
- B. ip
- C. ge
- D. gr

Correct Answer: BC

#### QUESTION 5

Exhibit

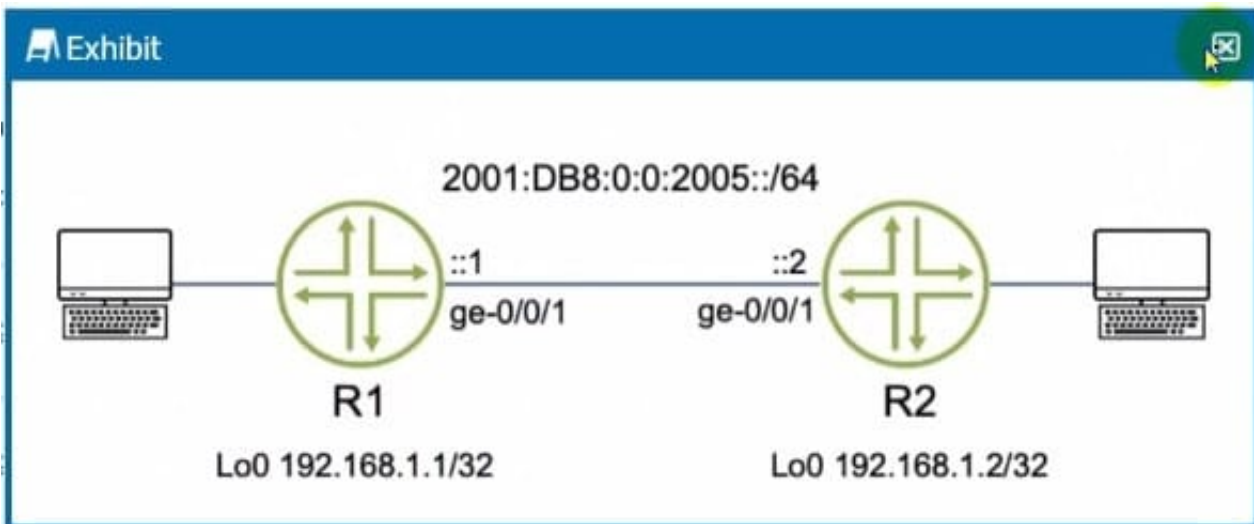

You are asked to configure OSPF between routers R1 and R2 using IPv6 addresses. Which two tasks will accomplish your objective? (Choose two.)

- A. Issue the sec protocols ospf area 0.0.0.0 interface ge-0/0/1.0 command.
- B. Under the [edit routing-options] hierarchy, configure a 32-bit router ID.
- C. issue the set protocols ospf3 area 0.0.0.0 interface ge-0/0/1.0 command.
- D. Under the [edit routing-options] hierarchy, configure a 128-bit router ID.

Correct Answer: AD

#### QUESTION 6



You are bringing a new network online with three MX Series devices enabled for STP. No root bridge priority has been configured. Which statement is true in this scenario?

- A. The device with the lowest MAC address will be elected as the root bridge.
- B. The device with the highest MAC address will be elected as the root bridge.
- C. The device with the lowest numerical lo0 IP address will be elected as the root bridge.
- D. The device with the highest numerical lo0 IP address will be elected as The bridge.

Correct Answer: A

### QUESTION 7


Which two LSA types are permuted in OSPF totally stubby areas? (Choose two.)

- A. Type 1
- B. Type 3
- C. Type 5
- D. Type 7

Correct Answer: CD

### QUESTION 8

Exhibit

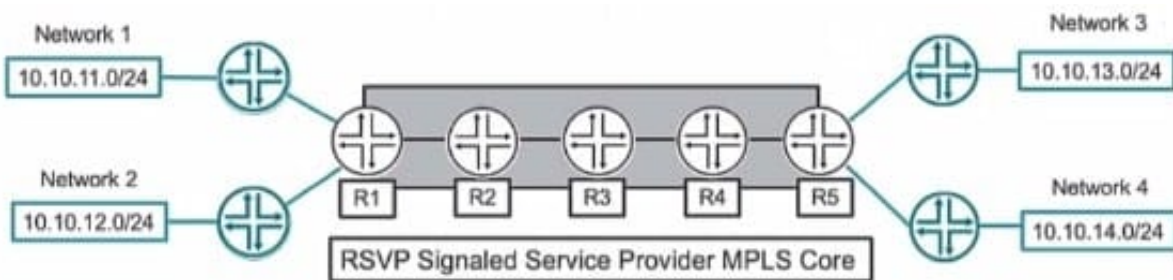

Referring to the exhibit, what is the minimum number of LSPs required to support all four networks?

- A. 1
- B. 2
- C. 8
- D. 4

Correct Answer: C

**QUESTION 9**

What are three well-known mandatory BGP attributes? (Choose three.)

- A. next hop
- B. origin
- C. community
- D. MED
- E. AS path

Correct Answer: ABE

---

**QUESTION 10**

You want to enable a routing platform with redundant REs to switch from a primary RE to a backup RE without alerting peer nodes. Which two technologies would you use to satisfy this requirement? (Choose two.)

- A. GRES
- B. VRRP
- C. NSR
- D. ISSU

Correct Answer: BC

---

**QUESTION 11**

Which LSA type does an OSPF ABR use to advertise external routes generated by an NSSAASBR into the backbone?


- A. Type 5
- B. Type 7
- C. Type 3
- D. Type 1

Correct Answer: C

---

**QUESTION 12**

Exhibit You confirm that the R2 and R3 routers are receiving a BGP route to the 203.0.113.0/24 network, but both routers display the route as hidden. Referring to the exhibit, which two actions solve this problem? (Choose two.)

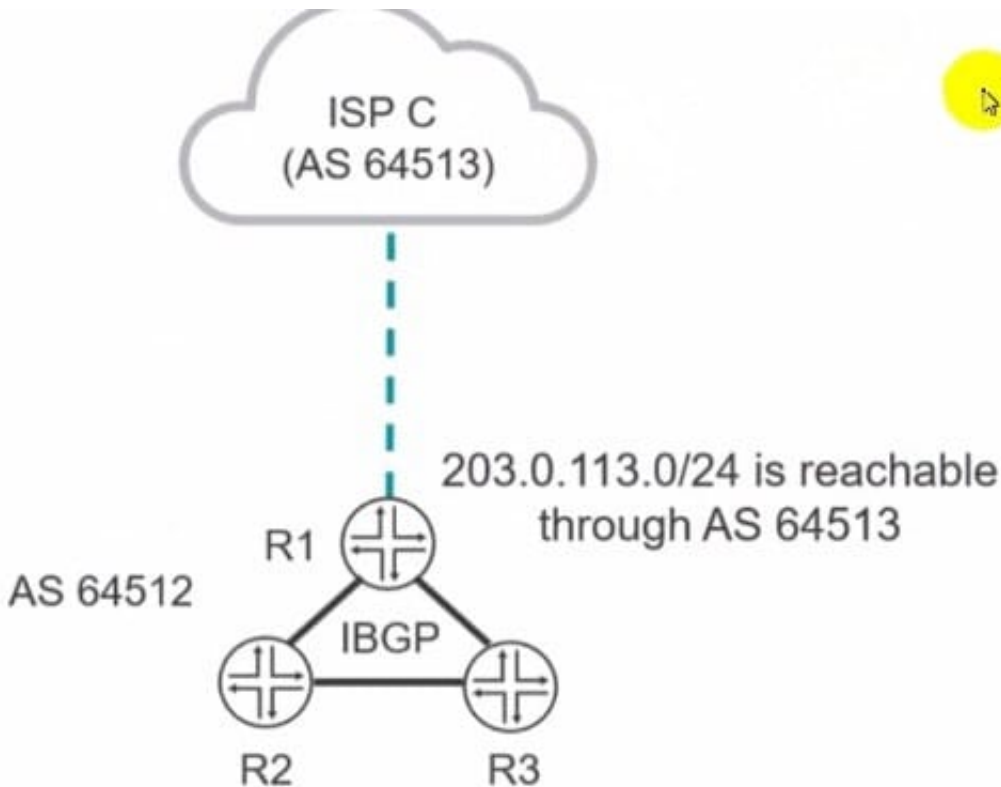


- A. Apply the routing policy on R1 as an export policy to the IBGP group.
- B. Apply the routing policy on R1 as an Import policy to the IBGP group.
- C. Configure a routing policy on R1 that sets the next hop for the 203.0.113.0/24 BGP route to the IP address that R1 uses for IBGP peering.
- D. Configure a routing policy on R1 that sets the next hop for the 203.0.113.0/24 BGP route to the IP address that R1 uses for EBGP peering.

Correct Answer: CD

### QUESTION 13

Exhibit The routers shown in the exhibit are configured for segment routing.

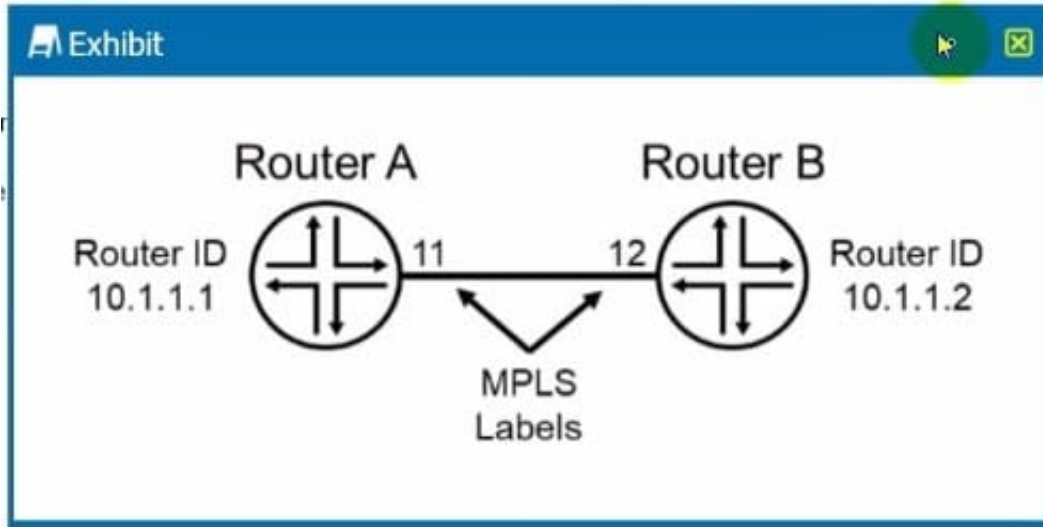

In this scenario, what is the adjacency SIO that Router B advertises to Router A?

- A. 12
- B. 10.1.1.1
- C. 10.1.1.2
- D. 11

Correct Answer: B

**QUESTION 14**

Exhibit





```
[edit]
user@router# show interfaces ge-0/0/0
unit 0 {
    family bridge {
        interface-mode trunk;
        vlan-id-list 101-120;
    }
}
[edit]
user@router# show interfaces ge-0/0/1
flexible-vlan-tagging;
unit 0 {
    vlan-id 200;
    family bridge {
        interface-mode trunk;
        inner-vlan-id-list 101-120;
    }
...
[edit]
user@router# show bridge-domains
...
[edit]
user@router# show bridge-domains
bd {
    vlan-id-list 101-120;
}
```

Referring to the exhibit, which two statements are correct? (Choose two.)

- A. Traffic ingressing ge-0/0/0 that is tagged with VLAN 101 will egress ge-0/0/1 unchanged.
- B. Traffic ingressing ge-0/0/0 that is tagged with VLAN 100 will be dropped.
- C. Traffic ingressing ge-0/0/0 that is tagged with VLAN 200 will egress ge-0/0/1 with an outer VLAN tag of 200.
- D. Traffic ingressing ge-0/0/0 that is tagged with VLAN 101 will egress ge-0/0/1 with an outer VLAN tag of 200.

Correct Answer: AB

#### QUESTION 15

You are asked to configure an LSP which uses the OSPF link state database for path computations. Which two statements are correct in this scenario? (Choose two.)

- A. You must use the no-cspf parameter in the label-switched-path configuration.
- B. Traffic engineering extensions are enabled by default in OSPF.
- C. Traffic engineering extensions are not enabled by default in OSPF.
- D. You must use the policing parameter in the label-switched-path configuration.



VCE & PDF

Pass4itSure.com

<https://www.pass4itsure.com/jn0-363.html>

2024 Latest pass4itsure JN0-363 PDF and VCE dumps Download

---

Correct Answer: AC

[Latest JN0-363 Dumps](#)

[JN0-363 Practice Test](#)

[JN0-363 Study Guide](#)