



# NS0-181<sup>Q&As</sup>

NetApp Certified Storage Installation Engineer - ONTAP 9.1

## Pass NetApp NS0-181 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass4itsure.com/ns0-181.html>

100% Passing Guarantee  
100% Money Back Assurance

Following Questions and Answers are all new published by NetApp  
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





### QUESTION 1


In an ONTAP switched cluster, which three types of traffic travels over the cluster network? (Choose three.)

- A. intercluster SnapMirror
- B. intracluster SnapMirror
- C. Epsilon voting
- D. cluster database replication
- E. remote cluster peering

Correct Answer: ADE

### QUESTION 2

Click the Exhibit button.

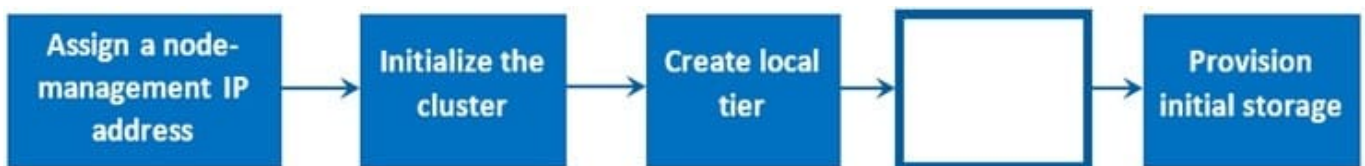

You plan to install a new ONTAP cluster at a customer site by using the new ONTAP System Manager 9.7 GUI. Referring to the exhibit, what must you do before you provision initial storage?

- A. Configure cluster LIFs.
- B. Configure protocols.
- C. Configure a remote tier.
- D. Configure aggregates.

Correct Answer: D

### QUESTION 3

You must replace a FAS2750 switchless cluster with an AFF A220 switchless cluster for a customer. The customer requires that you transfer the data from the FAS2750 cluster to the AFF A220. In this scenario, which two methods would you use to migrate the customer's data? (Choose two.)

- A. Establish an SVM-DR relationship between the two clusters and activate the destination SVM.
- B. Remove all of the HDD drives from the FAS cluster and install them into the AFF cluster.
- C. Install SAS cables between the two clusters and use the vol move command.



D. Provide cluster switches and build a 4-node cluster, then use the vol move command.

Correct Answer: CD

---

#### QUESTION 4

A customer has a current AFF ASA A700 cluster and they want to expand the cluster by adding a second AFF ASA A700 HA pair. In this scenario, which step would be required to accomplish this task?

- A. Install a BES-53248 cluster switch and convert the AFF ASA A700 from a switchless to switch cluster.
- B. Enable ALUA between the two HA pairs to allow cluster backend traffic.
- C. The customer will need to create a separate cluster for the second AFF ASA A700 pair.
- D. Install a Brocade FC switch and create zoning between the original cluster and the new cluster.

Correct Answer: A

---

#### QUESTION 5

Which two SVMs are automatically created during the cluster setup? (Choose two.)

- A. admin SVM
- B. system SVM
- C. node SVM
- D. data SVM

Correct Answer: AB

---

#### QUESTION 6

One of the nodes in your ONTAP 9.7 cluster has failed and is not coming back online.

Which two methods would you use to connect to the node failing to come back online? (Choose two.)

- A. Use the Intelligent Platform Management Interface.
- B. Use the Service Processor Interface.
- C. Use Secure Shell.
- D. Use Telnet.

Correct Answer: BC

---

**QUESTION 7**

Before starting a base installation on an AFF A400, you need to find out the default cluster interconnect ports for the AFF A400 controllers. In this scenario, which three resources would you use to find this information? (Choose three.)

- A. Hardware Universe (HWU)
- B. Interoperability Matrix Tool (IMT)
- C. hardware installation setup poster
- D. AFF FAS Documentation Center
- E. Active IQ Unified Manager

Correct Answer: ACD

---

**QUESTION 8**

You have installed and configured a new AFF C190 cluster with ONTAP 9.7. Your customer wants you to install the latest version of ONTAP. In this scenario, what are two methods to update ONTAP? (Choose two.)

- A. Use the cluster image package get and cluster image update commands.
- B. Use a USB drive with the new software image and let ONTAP automatically boot.
- C. Use ONTAP System Manager to download and install the new software image.
- D. Use ONTAP System Manager to upload and install the new software image.

Correct Answer: AC

---

**QUESTION 9**

You are installing a new ONTAP 9.7 cluster and attaching the cluster to two separate networks. Your customer has indicated that the same range of client IP addresses are used on both networks and that the networks are never allowed to communicate with each other.

In this scenario, which ONTAP feature must be configured to securely allow all clients to access ONTAP NAS protocols?

- A. BGP
- B. broadcast domains
- C. routing
- D. IPspaces

Correct Answer: B

Reference: <https://www.netapp.com/media/16885-tr-4182.pdf> (9)

---



### QUESTION 10

You completed an ONTAP cluster deployment as a reseller engineer. During the knowledge transfer process to the customer, they ask for proof that the array has correct multi-path HA cabling deployed and that the array is error free. Which documentation output would you present to the customer to satisfy this requirement?

- A. Active IQ Unified Manager output
- B. NetAppDocs output
- C. Config Advisor output
- D. Active IQ OneCollect output

Correct Answer: C

Reference: <https://docs.netapp.com/platstor/topic/com.netapp.doc.hw-controller-add/GUID-64A51339-1F03-451C-B062-9F97E772817E.html>

[NS0-181 PDF Dumps](#)

[NS0-181 VCE Dumps](#)

[NS0-181 Braindumps](#)