C9530-404^{Q&As}

IBM Integration Bus V9.0 Solution Development

Pass IBM C9530-404 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

https://www.pass4itsure.com/c9530-404.html

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by IBM Official Exam Center

⚙ **Instant Download** After Purchase

⚙ **100% Money Back** Guarantee

⚙ **365 Days** Free Update

⚙ **800,000+** Satisfied Customers

QUESTION 1

A company plans to emit Common Base Events to monitor the service level agreements for the Integration Bus application. To achieve this, a solution developer has to produce monitor profiles to emit events.

Which XPath expression can the developer use to produce suitable results?

A. $Body/Message

B. $LocalEnvironment

C. $Root/Soap/Body

D. $Root/Soap/Header

Correct Answer: B

QUESTION 2

A solution developer needs to develop a generic message handler that is common to all applications and message flows. The message handler parses a complex file than contains healthcare records and extracts Patient Eligibility requests. The developer wants to make and deploy changes to the message handler without redeploying all the message flows.

How should the developer define the Integration Bus artifacts?

Define the message handler as:

A. a subflow in a library and define the message flows as services that reference the library.

B. a subflow in a library and define the message flows as applications that reference the library.

C. a subflow in a library and define the message flows as independent resources that reference the library.

D. an integration service and define the message flows as applications that reference the integration service.

Correct Answer: D

QUESTION 3

Name	Type	Min Occurs	Max Occurs
▣ • POandACK			
▣ — sequence		1	1
▣ • Record		1	unbounded
▣ — sequence		1	1
• DocType	string	1	1
• PoNumber	string	1	1
• Customer	string	1	1
• TotalPrice	string	1	1
• ShipDate	string	1	1
• Items	string	1	unbounded

TheDocTypefield in the record identifies the document type and contains PO when the record is for a

purchase order and ACK when it is an acknowledgement.

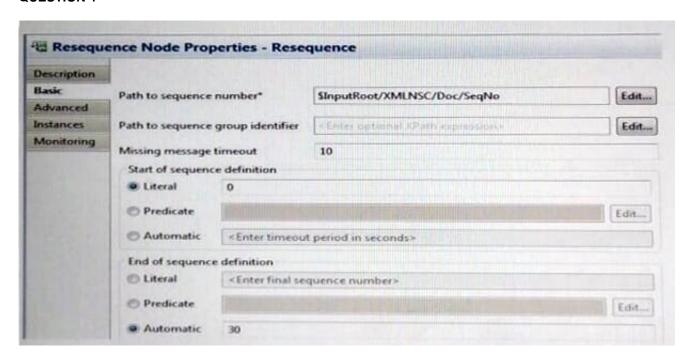The format of each record is the same except for theShipDatefield.When the document type is

ACK,ShipDateis in the record. When the document type is PO,ShipDateis not in the record.

What change can the developer make to the DFDL model to handle the differences in the record format

and prevent parsing errors when parsing a file that contains both types of records?

A. Add a choice element before theShipTypeelement

B. Add an asset toShipDatethat testsDocType=ACK

C. Add a discriminator toShipDatethat testsDocType=ACK

D. Change theMinOccursproperty to 0 (zero) forShipTypeto make it an optional field

Correct Answer: D

QUESTION 4

The following messages are sent to the MQ Input node, as described below:

 0 A

 1 B

 2 C

4 E

6 G

a delay of 11 seconds

5 F

a delay of another 11 seconds

3 D

What is the end result of processing this messages, using the "Value" element arriving in the specific order

listed?

A. A, B, Con MQ Output;F,Don MQ Output Failure; andE,Gon MQ Output Expire.

B. A, B, Con MQ Output;F,Don MQ Output Missing; andE,Gon MQ Output Expire.

C. A, B, Con MQ Output;D, Fon MQ Output Failure; andE,Gon MQ Output Expire.

D. A, B, Con MQ Output;D, Fon MQ Output Failure; andE,Gon MQ Output Failure.

Correct Answer: D

QUESTION 5

A solution developer is using accounting and statistics data to find a performance issue withina message flow.

Which type of statistics should the developer use?

A. Node statistics

B. Thread statistics

C. Terminal statistics

D. Message flow statistics

Correct Answer: D