



JN0-347^{Q&As}

Enterprise Routing and Switching, Specialist (JNCIS-ENT)

Pass Juniper JN0-347 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass4itsure.com/jn0-347.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Juniper
Official Exam Center

- ⚙ **Instant Download** After Purchase
- ⚙ **100% Money Back** Guarantee
- ⚙ **365 Days** Free Update
- ⚙ **800,000+** Satisfied Customers



**QUESTION 1**

What is the default route preference for BGP?


- A. 167
- B. 170
- C. 150
- D. 179

Correct Answer: B

BGP has the default preference .

QUESTION 2

Click the Exhibit button.

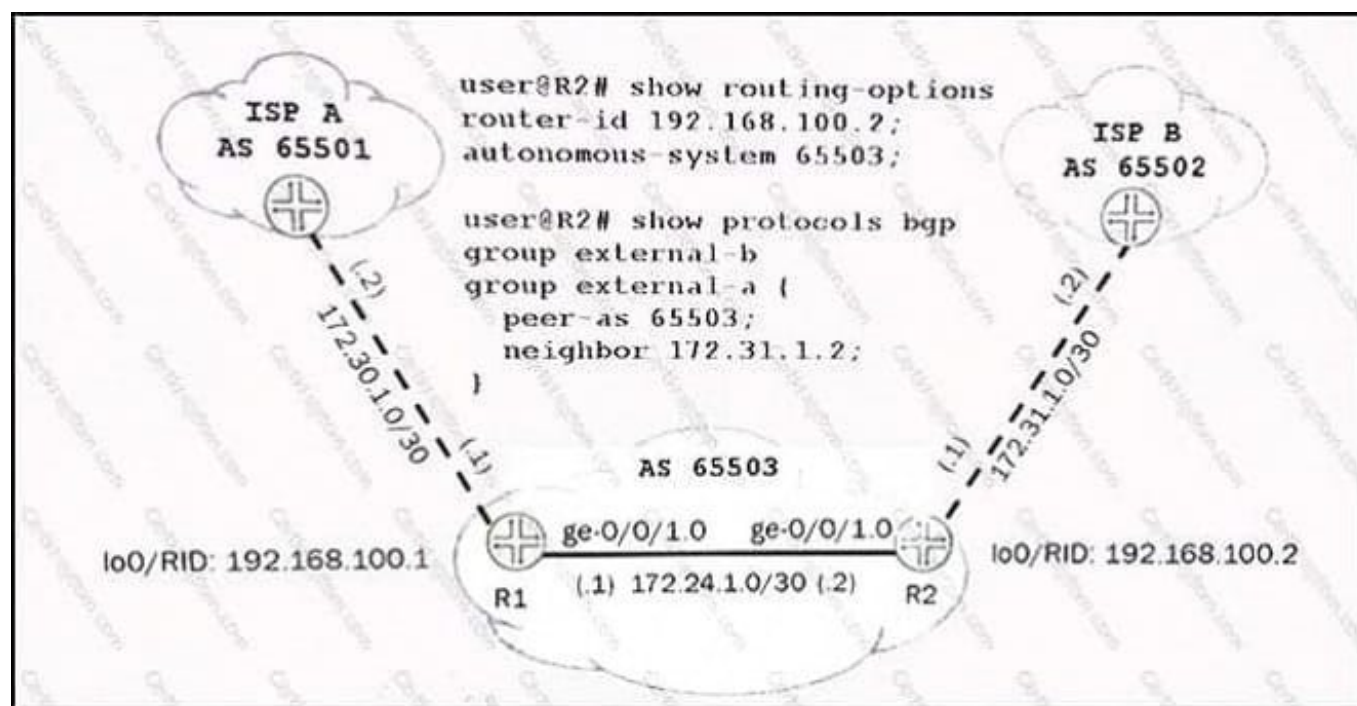

You are unable to establish a BGP session between R2 and ISP-B. Referring to the exhibit, what must be changed in the configuration?

- A. A local address statement with the lo0 address must be added to R2 under group external-a;
- B. An import policy statement must be added to R2 under group external-a to allow ISP-B to peer.
- C. The type external statement must be added to R2 under group external-b.
- D. The peer-as statement needs the AS number for ISP-B.



Correct Answer: D

QUESTION 3

Which protocol supports tunneling of non-IP traffic?

- A. GRE
- B. SSH
- C. IPsec
- D. IP-IP

Correct Answer: A

The GRE protocol (Generic Routing Encapsulation) which is a tunneling protocol that can encapsulate a variety of network layer packet types into a GRE tunnel. GRE therefore can encapsulate multicast traffic, routing protocols (OSPF, EIGRP etc) packets, and other non-IP traffic inside a point-to-point tunnel.

QUESTION 4

Click the Exhibit button.

```
{master:0}[edit]
user@host# show firewall family ethernet-switching
filter block {
    term 1 {
        from {
            ip-protocol icmp;
        }
        then accept;
    }
    term 2 {
        from {
            ip-source-address {
                172.25.11.1/32;
            }
        }
        then discard;
    }
    term 3 {
        from {
            ip-destination-address {
                172.25.11.0/24;
            }
        }
        then discard;
    }
}
```

Referring to the exhibit, which two statements are correct? (Choose two.)



- A. All traffic destined to the 172.25.11.0/24 subnet will be discarded.
- B. SSH traffic received from host IP 172.25.11.2 will be accepted.
- C. Any traffic not matched by one of the terms will be discarded.
- D. ICMP echo requests destined to 172.25.11.10 will be accepted.

Correct Answer: CD

QUESTION 5

Click the Exhibit button.

```
user@host> show route hidden

inet.0: 40472 destinations, 83201 routes (43201 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

0.0.0.0/0          [Aggregate] 06:55:56
                   Discard
```

Referring to the exhibit, why is the 0.0.0.0/0 route hidden?

- A. The next hop is set to discard.
- B. You already have an active BGP default route.
- C. You cannot make a 0.0.0.0/0 generated route.
- D. There are no contributing routes.

Correct Answer: D

[Latest JN0-347 Dumps](#)

[JN0-347 VCE Dumps](#)

[JN0-347 Braindumps](#)