



# MCD-LEVEL1-DELTA<sup>Q&As</sup>

MuleSoft Certified Developer - Level 1 (Mule 4) DELTA

## Pass Mulesoft MCD-LEVEL1-DELTA Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass4itsure.com/mcd-level1-delta.html>

100% Passing Guarantee  
100% Money Back Assurance

Following Questions and Answers are all new published by Mulesoft  
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





## QUESTION 1

Refer to the exhibits.

General Advanced Transactions

Required Libraries

MySQL JDBC Driver (mysql:mysql-connector-java:8.0.11) [Modify dependency](#)

Connection

Host: mudb.learn.mulesoft.com

Port: 3306

User:

Password: ●●●●●●●●  Show password

Database: database

### config.yaml

```
db:  
  host: "mudb.learn.mulesoft.com"  
  username: "mule"  
  password: "mule"
```

What is valid text to set the field in the Database connector configuration to the username value specified in the config.yaml file?

- A. \${db.username}>
- B. #[db.username]
- C. #[db:username]
- D. \${db:username}>

Correct Answer: A


## QUESTION 2

Refer to the exhibits.



```
##RAML 1.0
title: ACME Order API
version: 1.0
```

```
/order:
  post:
    body:
      application/xml:
        example: |
          <order oid="1001">
            <customerName>Annie Point
            </customerName>
            <itemName>Electric Standing Desk
            </itemName>
            <cost>300.00</cost>
          </order>
```

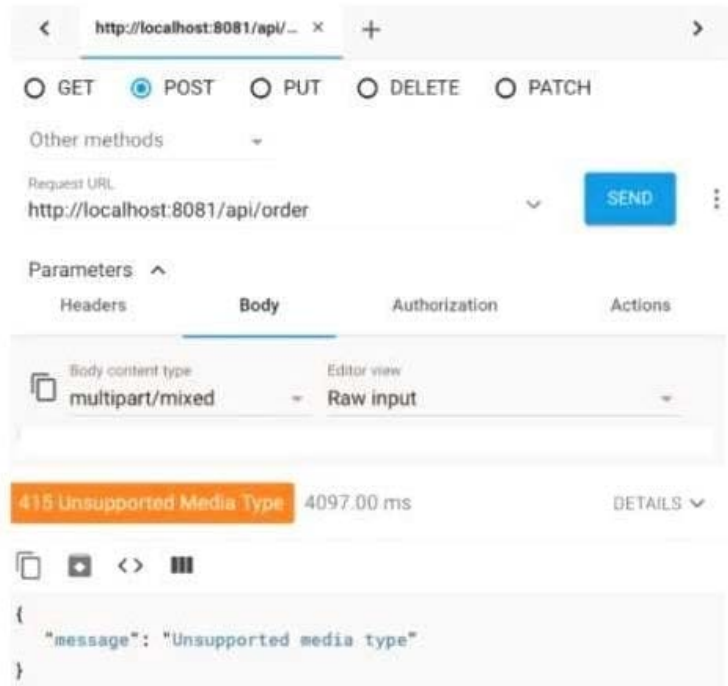

The web client sends a POST request to the ACME Order API with an XML payload. An error is returned. What should be changed in the request so that a success response code is returned to the web client?

- A. Set a request header with the name Content-Type to a value of application/octet-stream
- B. Set a request header with the name Content-Type to a value of application/xml
- C. Set a response header with the name Content-Type to a value of application/xml
- D. Set a response header with the name Content-Type to a value of application/octet-stream

Correct Answer: B

### QUESTION 3

Refer to the exhibit.





The main flow contains a Flow Reference for the child flow. What values are accessible in the child flow after a web client submits a request to `http://localhost:8Q81/order?color=red`?

- A. payload
- B. payload quantity var
- C. payload color query param
- D. payload quantity var color query param

Correct Answer: D

#### QUESTION 4

Refer to the exhibit. The input array of strings is passed to the batch job, which does NOT do any filtering or aggregating. What payload is logged by the Logger component?



- A. Summary report of processed records
- B. [ "Apple", "Banana" ]
- C. [ "Apptel2", "Bananal2" ]
- D. [ "Apptel", "Bananal", 2 ]

Correct Answer: B

#### QUESTION 5

An SLA based policy has been enabled in API Manager. What is the next step to configure the API proxy to enforce the new SLA policy?

- A. Add new property placeholders and redeploy the API proxy
- B. Add new environment variables and restart the API proxy
- C. Restart the API proxy to clear the API policy cache



D. Add required headers to the RAML specification and redeploy the new API proxy

Correct Answer: D

[MCD-LEVEL1-DELTA VCE Dumps](#)

[MCD-LEVEL1-DELTA Practice Test](#)

[MCD-LEVEL1-DELTA Study Guide](#)