



# MCD-LEVEL1-DELTA<sup>Q&As</sup>

MuleSoft Certified Developer - Level 1 (Mule 4) DELTA

## Pass Mulesoft MCD-LEVEL1-DELTA Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass4itsure.com/mcd-level1-delta.html>

100% Passing Guarantee  
100% Money Back Assurance

Following Questions and Answers are all new published by Mulesoft  
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



**QUESTION 1**

A Mule project contains a DataWeave module called MyModule.dwl that defines a function named formatString. The module is located in the project\\'s src/main/resources/modules folder. What is the correct way in DataWeave code to import MyModule using a wildcard and then call the module\\'s formatString function?

- A. 

```
%dw 2.0
output application/json
import * from modules.MyModule
---
MyModule.formatString( "annie point" )
```
- B. 

```
%dw 2.0
output application/json
import * from modules::MyModule
---
MyModule::formatString( "annie point" )
```
- C. 

```
%dw 2.0
output application/json
import * from modules.MyModule
---
formatString( "annie point" )
```
- D. 

```
%dw 2.0
output application/json
import * from modules::MyModule
---
formatString( "annie point" )
```

A. Option A

B. Option B

C. Option C

D. Option D

Correct Answer: D

**QUESTION 2**

Refer to the exhibits.



```

<flow name="main">
  <http:listener doc:name="HTTP: GET /" config-ref="HTTP_Listener_config" path="/" />
  <set-payload value="Success - Begin" doc:name="Success - Begin" />
  <http:request method="GET" doc:name="HTTP: GET /data" url="http://mu.learn.mulesoft.com/data"/>
  <set-payload value="Success - End mainFlow" doc:name="Success - End" />
  <error-handler >
    <on-error-continue enableNotifications="true" logException="true" doc:name="On Error Continue">
      <set-payload value="Error" doc:name="Error" />
    </on-error-continue>
  </error-handler>
</flow>

```

A web client submits a request to the HTTP Listener and the HTTP Request throws an error. What payload and status code are returned to the web client? Refer to the exhibits. A web client submits a request to the HTTP Listener and the HTTP Request throws an error.

What payload and status code are returned to the web client?


- A. Response body: "Error" Default response status code: 200
- B. Response body: "Success - Begin\*" Default response status code: 200
- C. Error response body: error, description Default error response status code: 500
- D. Response body: "Success - End" Default response status code: 200

Correct Answer: A

### QUESTION 3



Refer to the exhibits. The main flow contains an HTTP Request in the middle of the flow. The HTTP Listeners and HTTP Request use default configurations. A web client submits a request to the main flow's HTTP Listener that includes query parameters for the pedigree of the piano. What values are accessible to the Logger component at the end of the main flow?

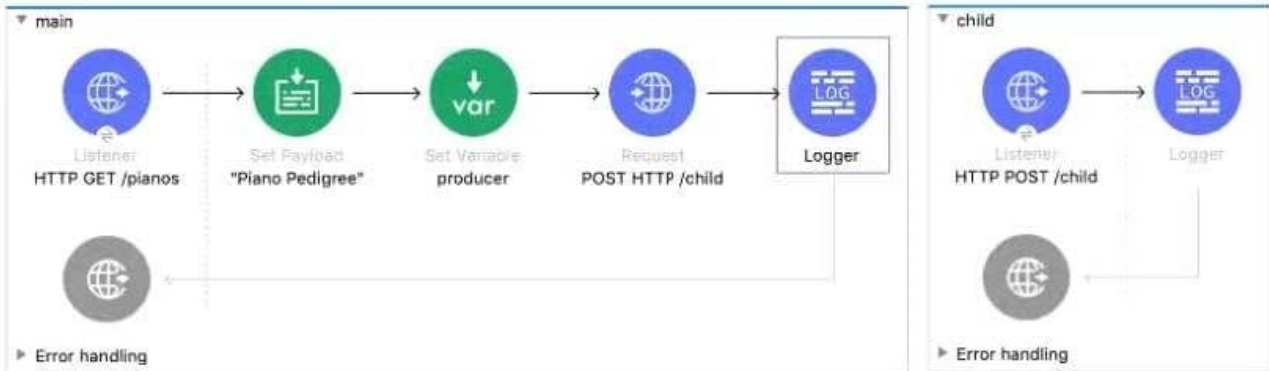

```
<http:request method="POST" doc:name="POST HTTP /child" url="http://localhost:8081/child">
</http:request>
<logger level="INFO" doc:name="Logger"/>
</flow>

<flow name="child" >
<http:listener doc:name="HTTP POST /child" config-ref="HTTP_Listener_config" path="/child"/>
```

- A. payload
- B. payload pedigree query params
- C. payload producer var
- D. payload pedigree query params producer var

Correct Answer: A

**QUESTION 4**

Refer to the exhibit.



```
<flow name="main">
  <http:listener doc:name="HTTP: GET /" config-ref="HTTP_Listener_config" path="/" />
  <http:request method="POST" doc:name="HTTP: POST /data" url="http://localhost:8081/data"/>
  <jms:publish-consume doc:name="JMS: num1" config-ref="JMS_Config" destination="num1"/>
  <jms:publish doc:name="JMS: num2" config-ref="JMS_Config" destination="num2"/>
  <set-payload value="#[payload + 1]" doc:name="payload + 1" />
</flow>
```

What payload is returned from a request to http://localhost.8081/

Refer to the exhibits, what payload is returned from a request to http://localhost;8081/?

- A. 1
- B. 2
- C. 3
- D. 4

Correct Answer: C

### QUESTION 5



Does a root element need when creating a response using Dataweave?

- A. None of these
- B. Sometimes
- C. Never
- D. Always

Correct Answer: B

Only needs for XMLs.

[Latest MCD-LEVEL1-DELTA Dumps](#)

[MCD-LEVEL1-DELTA Exam Questions](#)

[MCD-LEVEL1-DELTA Braindumps](#)