



MCD-LEVEL1-DELTA^{Q&As}

MuleSoft Certified Developer - Level 1 (Mule 4) DELTA

Pass Mulesoft MCD-LEVEL1-DELTA Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass4itsure.com/mcd-level1-delta.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Mulesoft
Official Exam Center


-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





QUESTION 1

Refer to the exhibits.

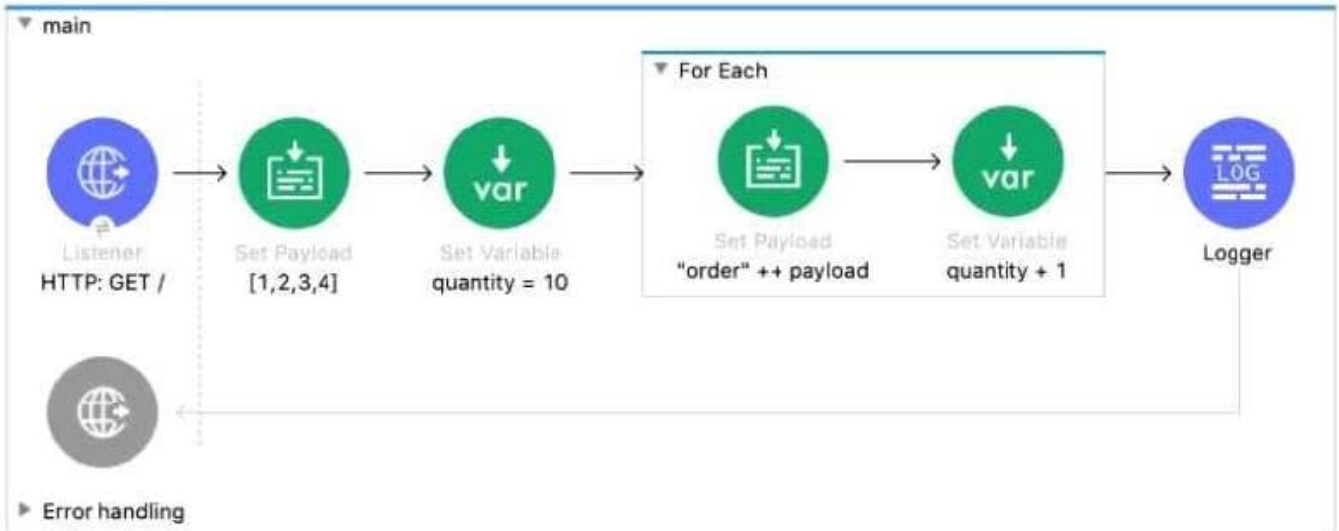

```
<flow name="main" >
  <http:listener doc:name="HTTP: GET /" config-ref="HTTP_listener_config" path="/" allowedMethods="GET"/>
  <set-payload value="#[[1,2,3,4]]" doc:name="[1,2,3,4]" />
  <set-variable value='10' doc:name="quantity = 10" variableName="quantity" />
  <foreach doc:name="For Each" >
    <set-payload value='#["order" ++ payload]' doc:name='"order" ++ payload' />
    <set-variable value="#[vars.quantity + 1]" doc:name="quantity + 1" variableName="quantity" />
  </foreach>
  <logger level="INFO" doc:name="Logger" message='#[[ payload, vars.quantity ]]' />
</flow>
```

What payload and quantity are logged at the end of the main flow?

- A. [[1,2,3,4], 14]
- B. [[order1, order2, order3, order4], 14]
- C. [[1,2,3,4], 10]
- D. [order1order2order3order4,14]

Correct Answer: A

QUESTION 2

A Database On Table Row listener retrieves data from a CUSTOMER table that contains a primary key userjd column and an increasing kxjin_date_time column. Neither column allows duplicate values. How should the listener be configured so it retrieves each row at most one time?

- A. Set the watermark column to the bgin_date_time column



- B. Set the target value to the last retrieved login_date_time value
- C. Set the target value to the last retrieved user_jd value
- D. Set the watermark column to the user_Id column

Correct Answer: A

QUESTION 3

Refer to the exhibits.

The screenshot shows the MuleSoft configuration interface for an HTTP Request. The 'Basic Settings' section has 'Name: HTTP_Request_config'. The 'URL Configuration' section has 'Base path: /'. The 'Connection' section has 'Protocol: HTTP (Default)', 'Host: mu.learn.mulesoft.com', and 'Port: 80'. To the right, a 'config.yaml' file is open, showing the following content:

```
1 training:  
2   host: "mu.learn.mulesoft.com"  
3   port: "80"  
4   basepath: "/"  
5   protocol: "HTTP"
```

A Mule application has an HTTP Request that is configured with hardcoded values. To change this, the Mule application is configured to use a properties file named config.yaml. what valid expression can the HTTP Request host value be set to so that it is no longer hardcoded?

- A. \${training.host}
- B. \${training:host}
- C. #[training:host]
- D. #[training.host]

Correct Answer: A

QUESTION 4

According to Semantic Versioning, which version would you change for incompatible API changes?

- A. MINOR



B. PATCH


C. MAJOR

D. No change

Correct Answer: C

QUESTION 5

Refer to the exhibits.

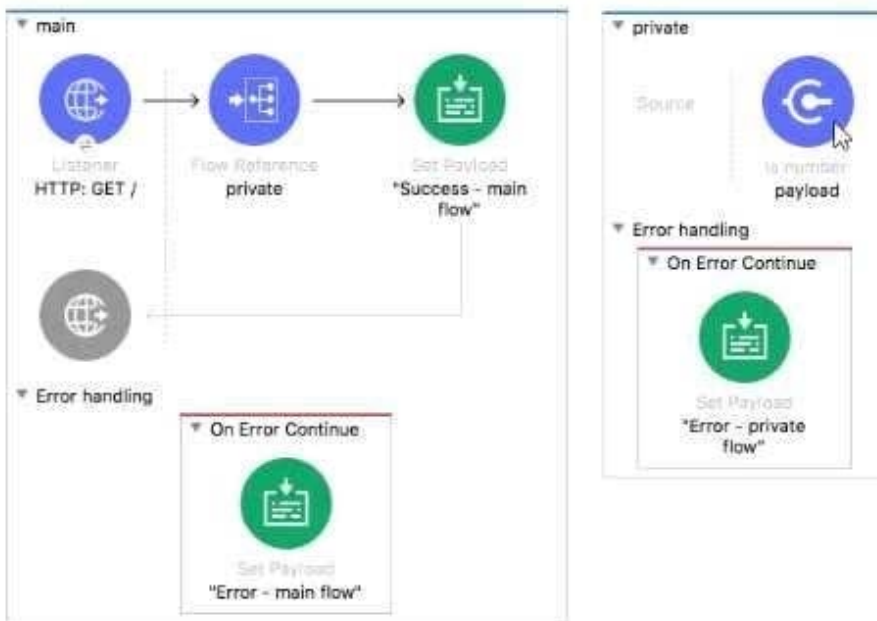

```
<flow name="main" >
  <http:listener doc:name="HTTP: GET /" config-ref="HTTP_Listener_config" path="/" />
  <flow-ref doc:name="private" name="private"/>
  <set-payload value="Success - main flow" doc:name=""Success - main flow"" />
  <error-handler>
    <on-error-continue enableNotifications="true" logException="true" doc:name="On Error Continue" >
      <set-payload value="Error - main flow" doc:name=""Error - main flow"" />
    </on-error-continue>
  </error-handler>
</flow>

<flow name="private" >
  <validation:is-number numberType="INTEGER" doc:name="payload" value="#[payload]"
  message="Validation Error" />
  <error-handler >
    <on-error-continue enableNotifications="true" logException="true" doc:name="On Error Continue" >
      <set-payload value="Error - private flow" doc:name=""Error - private flow"" />
    </on-error-continue>
  </error-handler>
</flow>
```

The Validation component in the private flow throws an error. What response message is returned to a client request to



the main flow\\s HTTP Listener?

- A. Error - private flow
- B. Error - main flow
- C. Success - main flow
- D. Validation Error

Correct Answer: C

[MCD-LEVEL1-DELTA PDF Dumps](#)

[MCD-LEVEL1-DELTA Practice Test](#)

[MCD-LEVEL1-DELTA Braindumps](#)