



MCD-LEVEL1^{Q&As}

MuleSoft Certified Developer - Level 1 (Mule 4)

Pass Mulesoft MCD-LEVEL1 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass4itsure.com/mcd-level1.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Mulesoft
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers



**QUESTION 1**

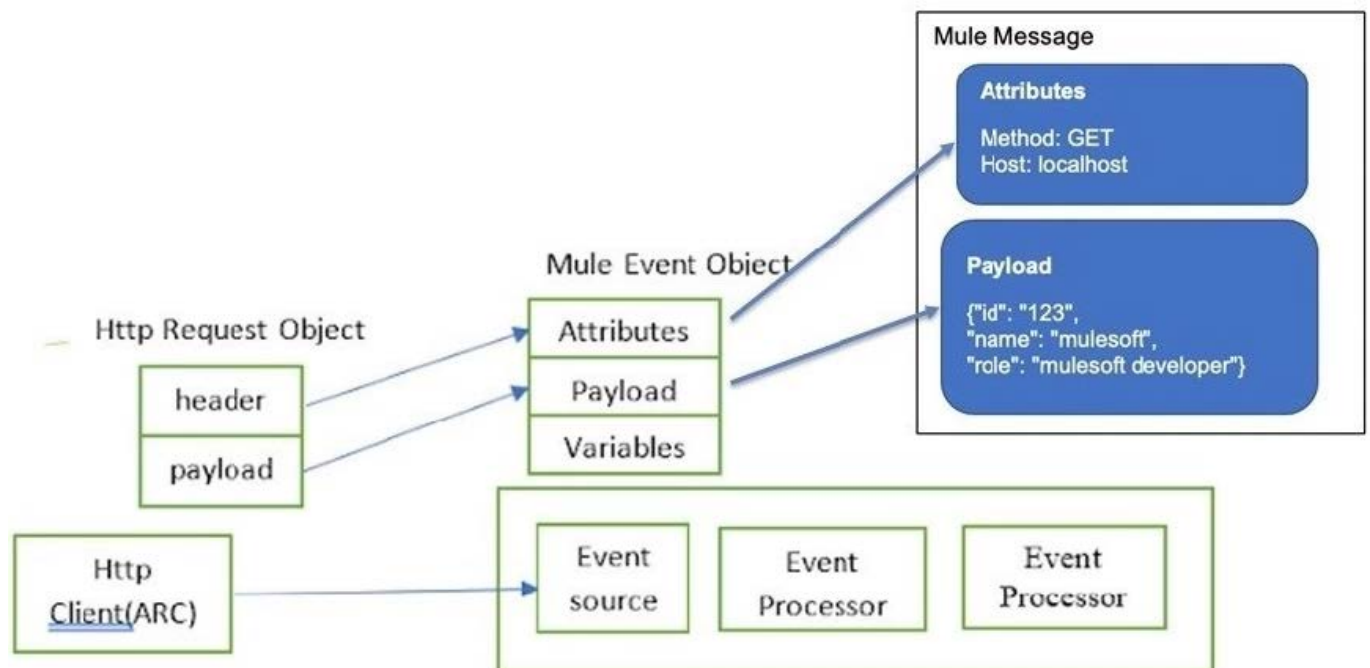
What happens to the attributes of a Mule event in a flow after an outbound HTTP Request is made?

- A. Attributes are replaced with new attributes from the HTTP Request response (which might be null)
- B. New attributes may be added from the HTTP response headers, but no headers are ever removed
- C. Attributes do not change
- D. Previous attributes are passed unchanged

Correct Answer: A

Attributes are replaced with new attributes from the HTTP Request response. Attributes include everything apart from Payload/body. For ex: Headers, query parameters, URI parameters. So, when outbound HTTP request is made, new attributes need to pass the outbound HTTP request and old attributes are replaced.

I have created below diagram to make it easy for you to understand:

**QUESTION 2**

Refer to the exhibit.



Is country US? x Problems Console

Choice Properties

Metadata

Notes

Required expression...ot defined in when.

Display Name: Is country US?

Business Events

Enabling this option will activate event tracking feature for this element and its children.

☐ Enable default events tracking

When	Route Message to
When	<input checked="" type="radio"/> domesticShipping
Default	<input checked="" type="radio"/> internationalShipping



What is a valid expression for the Choice router's when expression to route events to the documentShipping flow?

- A. 0#[payload = \"US\"]
- B. #[payload == \"US\"]
- C. #[if(payload = \"US\")]
- D. #[if(payload == \"US\")]

Correct Answer: B

Option 1 is the correct syntax

QUESTION 3

A web client submits a request to <http://localhost:8081/books/0471767840>. The value "0471767840" is captured by a Set Variable transformer to a variable named bookISBN.

What is the DataWeave expression to access bookISBN later in the flow?

- A. bookISBN
- B. attributes.bookISBN
- C. flowVars.bookISBN
- D. vars. bookISBN

Correct Answer: D

QUESTION 4

What is the correct syntax for a Logger component to output a message with the contents of a JSON Object payload?

- A. The payload is: \$(payload)
- B. #["The payload is: " ++ payload]
- C. The payload is: #[payload]
- D. #["The payload is: " + payload]

Correct Answer: B

Option 3 is the only correct answer as it concatenates payload with String.

Below option wont work.

#["The payload is " ++ payload]

Concatenation function expects both arguments to be string. As the question says payload is json object , this will throw error while running it. You can try this in Anypoint Studio and you will get the same result which I mentioned.



hence correct answer is

The payload is: #[payload]

QUESTION 5

A flow contains an HTTP Listener as the event source. What is the DataWeave expression to log the Content-Type header using a Logger component?

- A. #["Content-Type: " ++ attributes.headers.\\'content-type\\']
- B. #["Content-Type: " + headers.\\'content-type\\']
- C. #["Content-Type: " + attributes.headers.\\'content-type\\']
- D. #["Content-Type: " ++ headers.\\'content-type\\']

Correct Answer: A

Option 1 is the only correct choice due to two reasons. 1) Concatenation is always with ++ sign and not with + sign which makes option 2 and 3 wrong 2) headers can be accessed with attributes. headers and not with only headers which makes option 4 incorrect

[MCD-LEVEL1 PDF Dumps](#) [MCD-LEVEL1 Practice Test](#) [MCD-LEVEL1 Braindumps](#)