



# NSE8\_811<sup>Q&As</sup>

Fortinet NSE 8 Written Exam (NSE8\_811)

**Pass Fortinet NSE8\_811 Exam with 100% Guarantee**

Free Download Real Questions & Answers **PDF** and **VCE** file from:

[https://www.pass4itsure.com/nse8\\_811.html](https://www.pass4itsure.com/nse8_811.html)

100% Passing Guarantee  
100% Money Back Assurance

Following Questions and Answers are all new published by Fortinet  
Official Exam Center

- ⚙️ **Instant Download** After Purchase
- ⚙️ **100% Money Back** Guarantee
- ⚙️ **365 Days** Free Update
- ⚙️ **800,000+** Satisfied Customers





### QUESTION 1

You are asked to add a FortiDDoS to the network to combat detected slow connection attacks such as Slowloris.

Which prevention mode on FortiDDoS will protect you against this specific type of attack?

- A. asymmetric mode
- B. aggressive aging mode
- C. rate limiting mode
- D. blocking mode

Correct Answer: B

---

### QUESTION 2

Refer to the exhibit.



```
config system interface
  edit "port1"
    set ip 10.10.10.3 255.255.255.0
  next
end
```

```
config firewall ippool
  edit "secondary_ip"
    set startip 172.16.1.254
    set endip 172.16.1.254
  next
end
```

```
config firewall central-snat-map
  edit 1
    set orig-addr "internal"
    set srcintf "port2"
    set dst-addr "all"
    set dstintf "port1"
    set nat-ippool "secondary_ip"
    set protocol 6
  next
end
```

Central NAT was configured on a FortiGate firewall. A sniffer shows ICMP packets out to a host on the Internet egresses with the port1 IP address instead of the virtual IP (VIP) that was configured

Referring to the exhibit, which configuration change will ensure that ICMP traffic is also translated?



- A. `config firewall central-snat-map`  
    `edit 1`  
        `set protocol 1`  
    `next`  
    `end`
- B. `config firewall central-snat-map`  
    `edit 1`  
        `unset protocol`  
    `next`  
    `end`
- C. `config firewall ippool`  
    `edit "secondary_ip"`  
        `set arp-intf 'port1'`  
    `next`  
    `end`
- D. `config firewall central-snat-map`  
    `edit 1`  
        `set orig-addr "all"`  
    `next`  
    `end`

A. Option A

B. Option B

C. Option C

D. Option D

Correct Answer: B

---

### QUESTION 3

You have configured an HA cluster with two FortiGate devices. You want to make sure that you are able to manage the individual cluster members directly using port3.



```
config system ha
  set mode a-a
  set group-id 1
  set group-name main
  set hb_dev port2 100
  set session-pickup enable
end
```


Referring to the configuration shown, in which two ways can you accomplish this task? (Choose two.)

- A. Create a management VDOM and disable the HA synchronization for this VDOM, assign port3 to this VDOM, then configure specific IPs for port3 on both cluster members.
- B. Configure port3 to be a dedicated HA management interface; then configure specific IPs for port3 on both cluster members.
- C. Allow administrative access in the HA heartbeat interfaces.
- D. Disable the sync feature on port3; then configure specific IPs for port3 on both cluster members.

Correct Answer: AB

#### QUESTION 4

Refer to the exhibit.

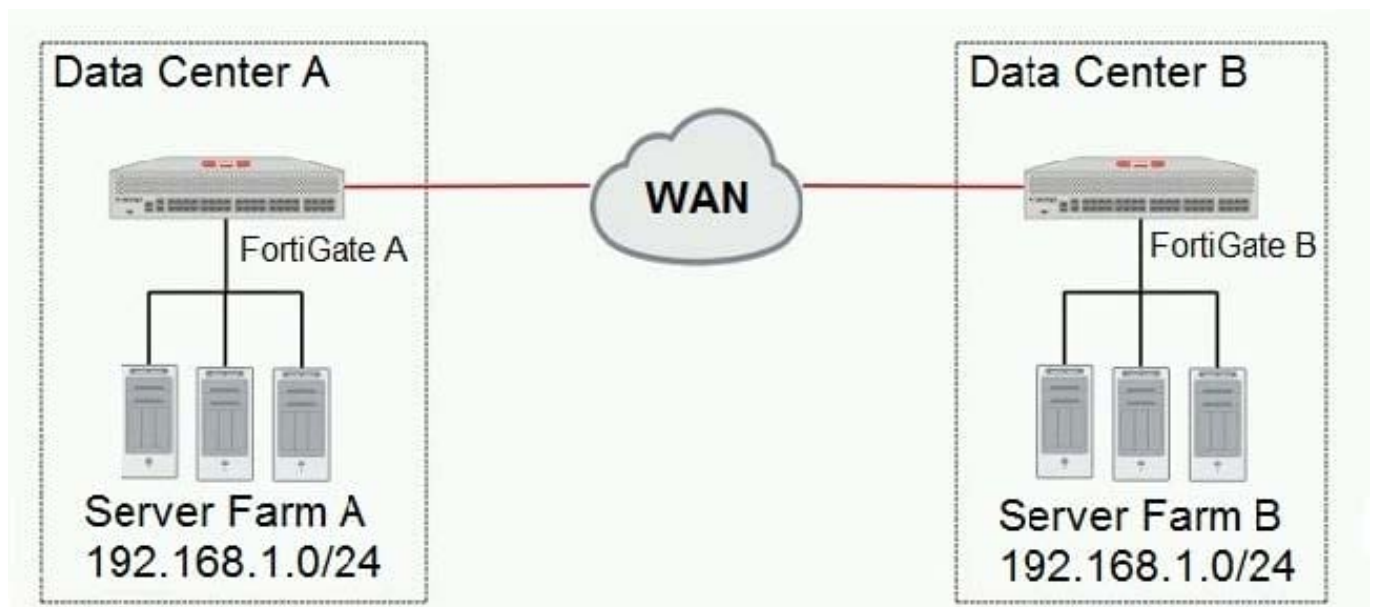

A company has two data centers (DC) connected using a Layer 3 network. Servers in farm A need to connect to servers in farm B as though they were all in the same Layer 2 segment.

Referring to the exhibit, what is configured on the FortiGate devices on each DC to allow this connectivity?



- A. Create an IPsec tunnel with VXLAN encapsulation.
- B. Create an IPsec tunnel with VLAN encapsulation.
- C. Create an IPsec tunnel with transport-mode encapsulation.
- D. Create an IPsec tunnel with tunnel-mode encapsulation.

Correct Answer: A

---

#### QUESTION 5

Consider the following configuration setting:

```
config user setting
  set auth-type https ftp
  set auth-cert "Fortinet_Factory"
  set auth-timeout 5
  set auth-timeout-type hard-timeout
  set auth-blackout-time 15
  set auth-lockout-threshold 5
  set auth-lockout-duration 10
end
```

Which two statements about local authentication are true? (Choose two.)

- A. The FortiGate will allow the TCP connection when a ClientHello message indicating a renegotiation is received.
- B. The user's IP address will be blocked 15 seconds after five login failures.
- C. The user will be blocked 15 seconds after five login failures.
- D. The user will need to re-authenticate after five minutes.

Correct Answer: BD

[NSE8\\_811 VCE Dumps](#)

[NSE8\\_811 Practice Test](#)

[NSE8\\_811 Braindumps](#)