



QSDA2022^{Q&As}

Qlik Sense Data Architect Certification-2022

Pass Qlik QSDA2022 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass4itsure.com/qsd2022.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Qlik Official Exam Center

- ⚙ **Instant Download** After Purchase
- ⚙ **100% Money Back** Guarantee
- ⚙ **365 Days** Free Update
- ⚙ **800,000+** Satisfied Customers



**QUESTION 1**

Refer to the exhibit.

Price Groups		
Start	Stop	Price Group
0.00	9.99	0-10
10.00	19.99	10-20
20.00	29.99	20-30
30.00	39.99	30-40
40.00	49.99	40-50
50.00	59.99	50-60


A data architect must classify each product into a price group. The price groups must be the same width by default and allow users to dynamically change the width of the bucket during analysis. Which feature should the data architect use to meet these requirements?

- A. Class function in the script and use variables
- B. Class function in a calculated dimension
- C. Nested IFs in a calculated dimension
- D. IntervalMatch and use variables

Correct Answer: B

QUESTION 2

Refer to the exhibit.

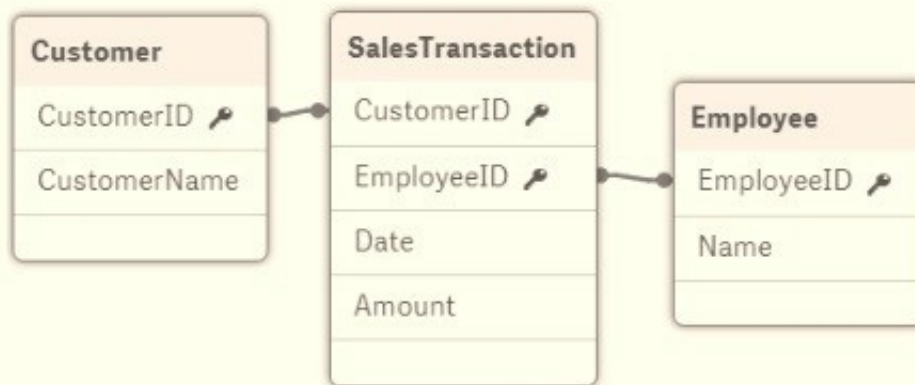

CustomerID	CustomerName	Country
A1537438	Durgan Ltd	United Kingdom
A3055345	Kertzmann and Sons	United States of America
I1803273	Weissnat, Morar and Mills	USA
Z5373110	Towne, Von and Gulgowski	UK
KK720402	Shanahan	U.S.A
AA82402	Globex	Japan
BB29729	Grant	France
B11764	Bernhard, Hettinger and Kautzer	New Zealand

EmployeeID	Name
AMER001	Alice
AMER99837	Bob
EMEA1207	Carlos
APAC3322	Grace
APAC92611	John
EMEA1304	Heidi

A global sales organization operates in three regions: AMERICAS, EMEA: and APAC. Each region stores its sales transactions in a separate database in which the employees update customer data through a third-party app. The data is

extracted into three QVDs.

A data architect sets up a two-tier architecture for the data load. The data architect needs to add the region to the data model.

Which technique should the data architect use to create the Region field?

- A. Create a Region field in the SalesTransaction table and populate using fixed region values while loading from each source
- B. Create a Region field in the Employee table and populate using the LTrim function on the EmployeeID
- C. Create a Region field in the Employee table and populate using the SubField function on the EmployeeID



D. Create a Region field in the SalesTransaction table and create a mapping table based on the Country field in the Customer table

Correct Answer: A

QUESTION 3

Refer to the exhibit.

```
239
240     CompaniesDetails:
241     LOAD [CompanyID],
242           Age(Today(),CompanyStarted) as CompanyAge;
243     LOAD
244           [CompanyID],
245           [CompanyStarted]
246
247     FROM [lib://MyDataFiles/DAExam1.xlsx]
248     (ooxml, embedded labels, table is [Company Names]);
249
250     let a = FieldName(2, 'CompaniesDetails');
251     Trace $(a);
252
253     CompaniesDesc:
254     LOAD
255           [CompanyID],
256           [CompanyDescription],
257           [CompanyName]
258     FROM [lib://MyDataFiles/DAExam1.xlsx]
259     (ooxml, embedded labels, table is [Company Names]);
260
```

A business analyst reports that the 'CompanyAge' field does NOT display for users. The data architect examines the LOAD script and wants to place the breakpoint in the script to check the field name.

Which line number should the data architect use?

- A. 242 because field name appears in the output Panel of the debugger
- B. 251 because the field name appears in the Variable panel of the debugger
- C. 251 because the field name appears in the Qlik Log files
- D. 251 because the field name appears in the Output panel of the debugger



Correct Answer: D

QUESTION 4

Refer to the exhibit.

```
Table_Map:
Mapping Load *;
LOAD * INLINE [
  Field_1, Field_2
  A, 1
  B, 2
  C, 3];
Table_A:
LOAD ApplyMap('Table_Map', Field_1) as Field_1;
LOAD * INLINE
[Field_1
D];
```

A data architect executes the script.

What will be the value of the first row for Field_1?

- A. A
- B. D
- C. Null
- D. 4

Correct Answer: B

QUESTION 5

Refer to the exhibit.



```
LIB CONNECT TO 'SQL (abc_qservice)';

OrderHeader:
LOAD CustomerID,
      EmployeeID,
      OrderDate,
      OrderID;
SQL SELECT CustomerID,
      EmployeeID,
      OrderDate,
      OrderID
FROM orders;

OrderData:
LOAD
      OrderID,
      OrderSalesAmount
FROM [lib://QVD (abc_qservice)/OrderData.qvd]
(qvd);

OrderDetail:
LOAD LineNo,
      OrderID,
      ProductNumber,
      Price;
SQL SELECT *
FROM orderdetails;
```

An existing app on Qlik Sense Enterprise is duplicated and transferred to a data architect to add some additional data. When trying to manually reload the original script, the data architect receives an error. What should be done to make sure the script runs correctly?

- A. Add the line lib connect to '\\QVD(abc_qservice/orderData.qvd) \\' before the LOAD for the Order Data table
- B. Add the line lib connect to '\\ SQL (abc_qs9rvi.es) ` ' before the LOAD for the Order Detail table
- C. Give the data architect the Read rights on the data connections in the QMC
- D. Make the data architect the owner of the app in the QMC

Correct Answer: C

[Latest QSDA2022 Dumps](#)

[QSDA2022 VCE Dumps](#)

[QSDA2022 Study Guide](#)