# UIPATH-ARDV1<sup>Q&As</sup>

UiPath Advanced RPA Developer v1.0 Exam (UiARD)

# Pass UiPath UIPATH-ARDV1 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

**https://www.pass4itsure.com/uipath-ardv1.html**

## 100% Passing Guarantee
## 100% Money Back Assurance

Following Questions and Answers are all new published by UiPath Official Exam Center



🔧 **Instant Download** After Purchase

🔧 **100% Money Back** Guarantee

🔧 **365 Days** Free Update

🔧 **800,000+** Satisfied Customers

**QUESTION 1**

A developer automates a process which has an Excel file as input data; however, Orchestrator is not available. As a result, the developer needs to adapt the Robotic Enterprise (RE) Framework for use with tabular data. Based on UiPath best practices, where should the Excel file be read and stored in a global DataTable variable?
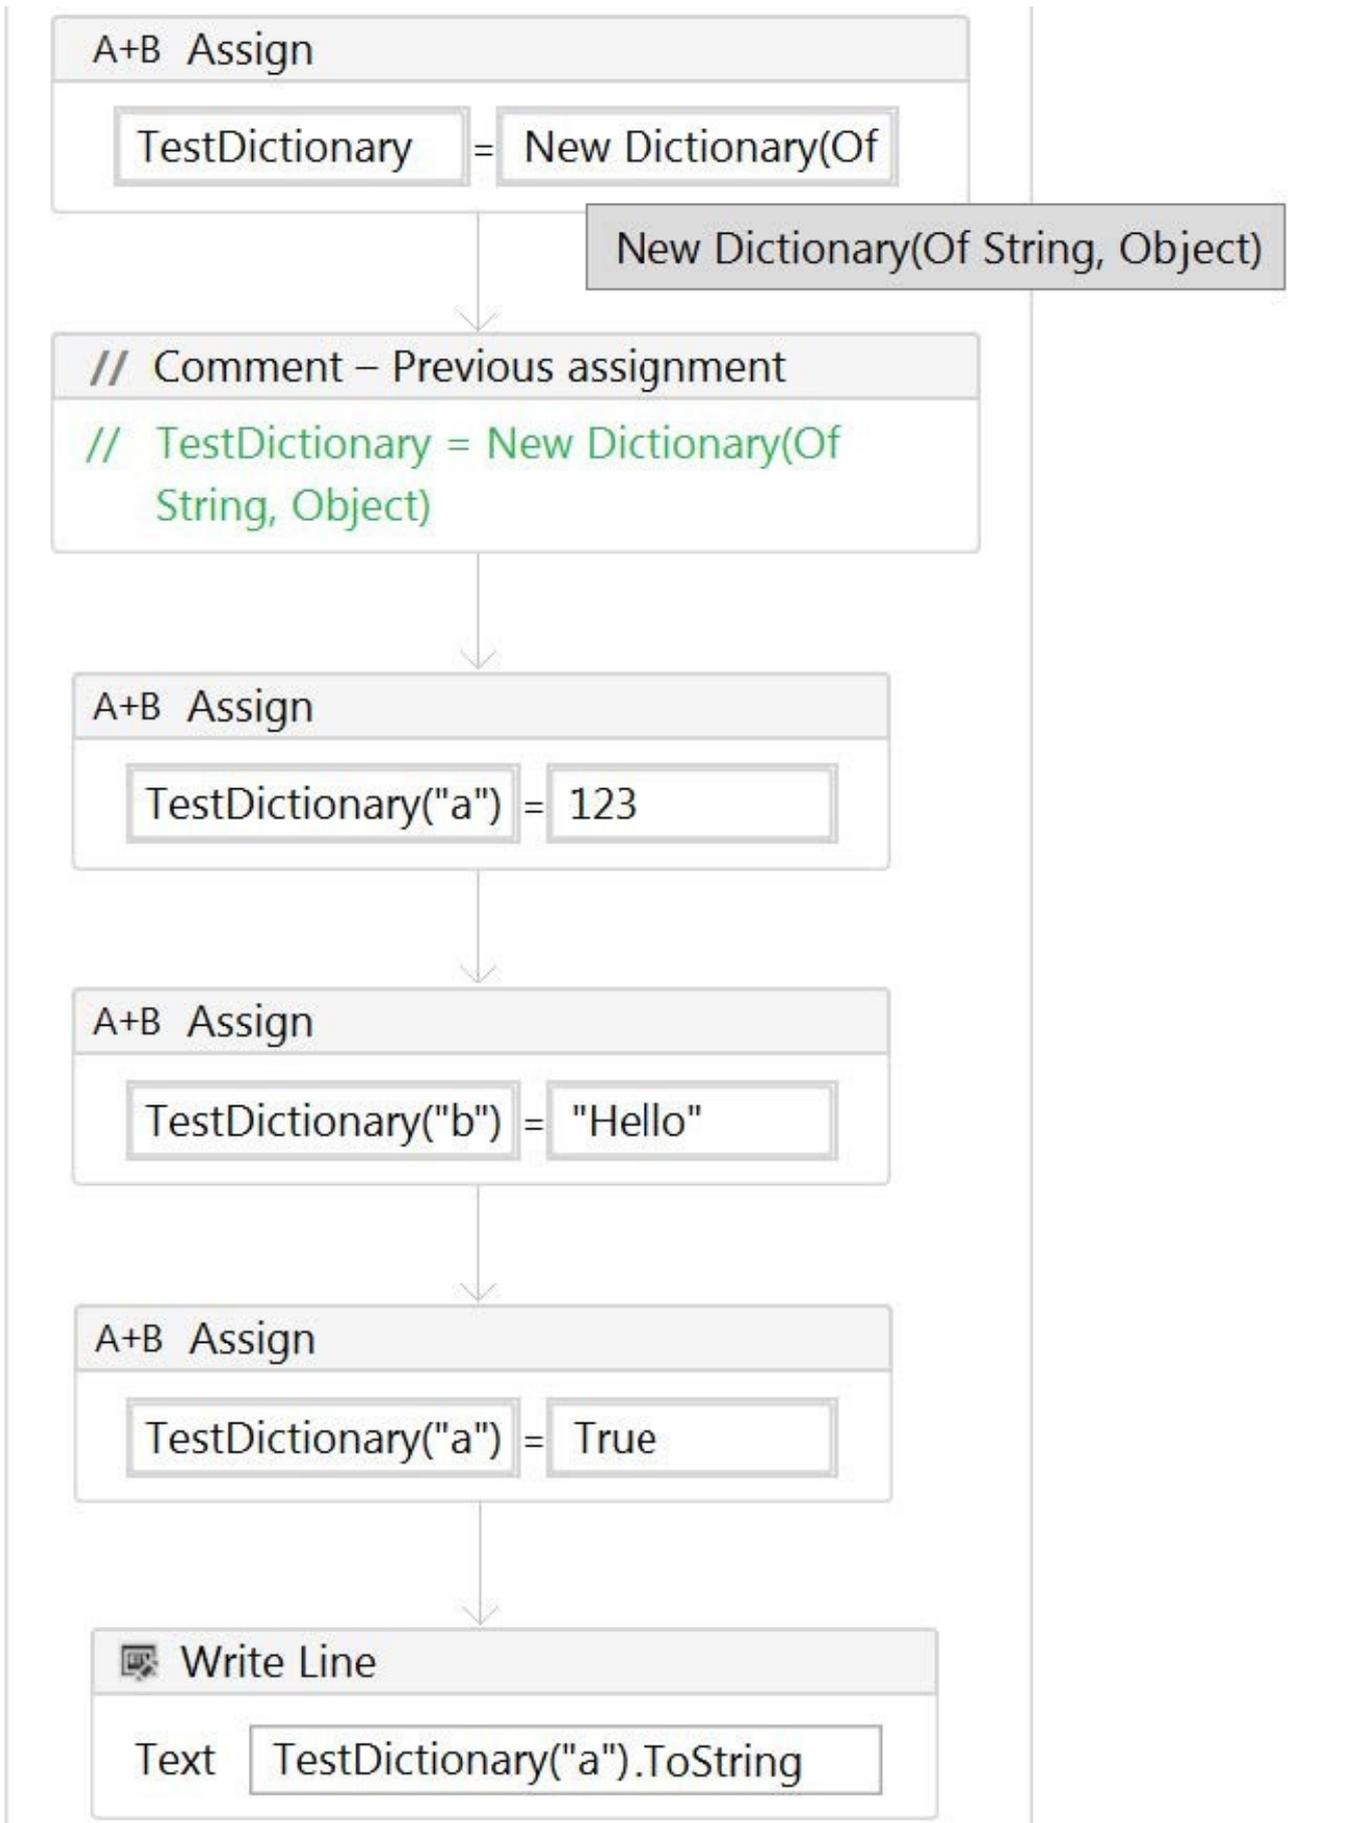
A. In the new state in the Main.xaml that transitions from Init.

B. In the InitAllApplications.xaml workflow.

C. In the Get Transaction Data state in the Main.xaml.

D. In the Ina state of the Main.xaml in the First Run sequence.

Correct Answer: C

Reference: https://forum.uipath.com/t/can-we-use-robotic-enterprise-framework-for-small-scenario-like-printing-table-of-5/72507

---

**QUESTION 2**

Review the following exhibit: Based on the exhibit, what is the result of the Write Line in the sequence?

A+B  Assign

| TestDictionary | = | New Dictionary(Of |

New Dictionary(Of String, Object)

// Comment – Previous assignment

// TestDictionary = New Dictionary(Of String, Object)

A+B  Assign

| TestDictionary("a") | = | 123 |

A+B  Assign

| TestDictionary("b") | = | "Hello" |

A+B  Assign

| TestDictionary("a") | = | True |

Write Line

| Text | TestDictionary("a").ToString |

A. 123

B. True

C. Hello

D. 123True

Correct Answer: B

## QUESTION 3

Which activity is used to call another piece of automation?

A. Open Application

B. Invoke Workflow File

C. Flowchart

Correct Answer: B

## QUESTION 4

A developer wants to initialize a dictionary with a key of integers and values that are strings. Which initialization expression should be used?

A. New Dictionary (Of Int32, String) from {{"3", "5"}, {"three", "five"}}

B. New Dictionary (Of Int32, String) from {{3, "three"}, {5, "five"}}

C. New Dictionary (Of Int32, String) from {{"3", "three"}, {"5", "five"}}

D. New Dictionary (Of Int32, String) from {{3, 5}, {"three", "five"}}

Correct Answer: B

## QUESTION 5

What is the slowest method of reading text?

A. Native

B. FullText.

C. OCR

Correct Answer: C

Latest UIPATH-ARDV1 Dumps

UIPATH-ARDV1 VCE Dumps

UIPATH-ARDV1 Exam Questions