

100% Money Back Guarantee

Vendor: Oracle

Exam Code: 1Z0-046

Exam Name: Oracle Database 10g: Managing Oracle on Linux for DBAs

Version: Demo

QUESTION 1

ho.sh is an executable shell script. You executed the following command that leads to an error:

```
$ strace -o /tmp/ho.out ./ho.sh  
strace: exec: Permission denied
```

What could you do to execute the command successfully in the next attempt?

- A. Provide the shell reference with the command.
- B. Remove the shell reference present inside the shell script.
- C. Execute the command as the root operating system user.
- D. The extension for the output file should be changed to .log.

Correct Answer: A

QUESTION 2

You executed the following command on a Linux machine:

```
$ cat /proc/slabinfo | grep kio  
kiocx 270 270 128 9 9 1 : 252 126  
kiocb 66080 66080 96 1652 1652 1 : 252 126  
kiobuf 236 236 64 4 4 1 : 252 126
```

Which statement describes the purpose of executing the command?

- A. To check the virtual memory usage in the Linux system
- B. To compare the I/O statistics of different channels in the system
- C. To check whether the asynchronous I/O is working in the Linux system
- D. To check whether multiple data bus adapters are being used in the Linux system
- E. To check whether the shared memory file system is being used in the Linux system

Correct Answer: C

QUESTION 3

Which statement correctly describes the swap cache in the Linux memory model?

- A. It is an area in the swap file that maintains the number of page ins and page outs for every process.
- B. It contains the page entry table to record the addresses of in-memory pages that are not swapped out at all.
- C. It is an area in the RAM that is used to record the number of swap in and swap out operation for every page.
- D. It is an area in the RAM that tracks the pages that are swapped out and have not been modified since they were swapped out.

Correct Answer: D

QUESTION 4

Which statement correctly describes the functionality of OS Watcher (OSW)?

- A. It is a utility that gathers information about the database server and network in HTML format.
- B. It is a collection of scripts that collects and archives the operating system (OS) and network metrics.
- C. It is a utility that is used to prepare the setup before collecting information using the rda.sh -v command.
- D. It is a Linux command that records and archives system calls triggered by processes as well as signals received by the processes.

Correct Answer: B

QUESTION 5

Examine the content of the /proc/sys/kernel/tainted file on your Linux machine:

```
[root@edtdt6p1 root]# cat /proc/sys/kernel/tainted 1
```


What will happen when you install Oracle Database 10g on this machine?

- A. Installation will fail because of the tainted kernel.
- B. Installation will be successful, but Oracle will not provide support for the database product.
- C. Installation will be successful. Oracle will provide support for the database product but not for the operating system (OS).
- D. Installation will be successful and Oracle will provide support for the database product as well as the OS.
- E. Successful installation and Oracle support for database product as well as Linux OS will depend on the module tainting the kernel.

Correct Answer: E

QUESTION 6

View the Exhibit and examine the highlighted entry.

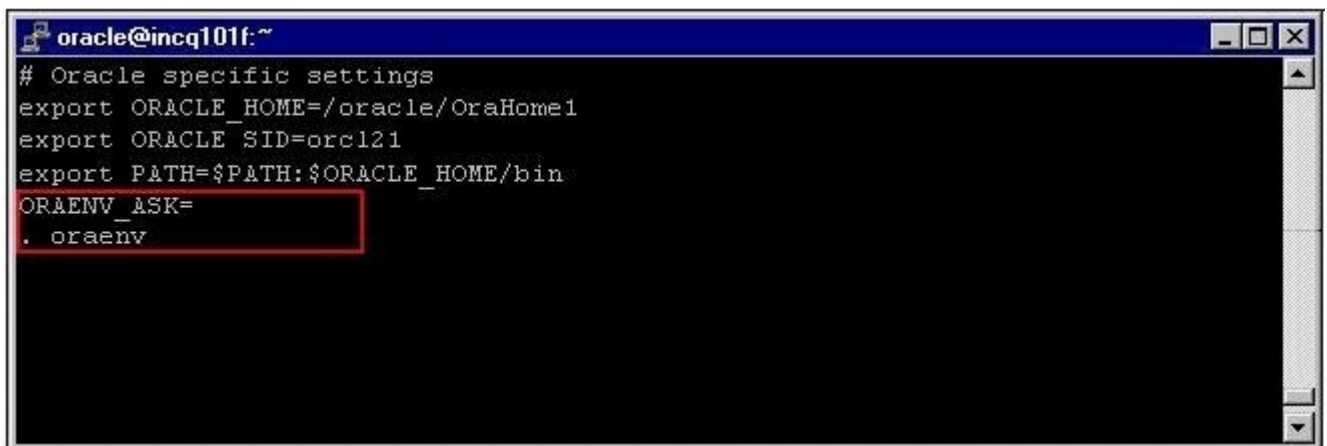

```
oracle@incq101f:~
# Oracle specific settings
export ORACLE_HOME=/oracle/OraHome1
export ORACLE_SID=orcl21
export PATH=$PATH:$ORACLE_HOME/bin
ORAENV_ASK=
. oraenv
```

You added a call to the oraenv script in a user's login script. Which two statements are true about this entry? (Choose two.)

- A. The entry will run the oraenv script in the current shell.
- B. The entry will prompt the user for ORACLE_SID that the user wants to set.
- C. The entry will call another script orainst to verify Oracle environment variables.
- D. The entry will set up the ORACLE_HOME environment variable without prompting the user.

Correct Answer: AB

QUESTION 7

You have the following operating system (OS) groups:

- 1)dba This is the OSDBA group.
- 2)oper This is the OSOPER group.
- 3)oinstall This is the owner of Oracle software.

Which groups do you need to assign to an OS user to enable that user to connect as "I as sysdba"?

- A. Only 1
- B. 1,2, and 3

- C. 1 and 2; 3 not required
- D. 2 and 3; 1 not required
- E. 1 and 3; 2 not required

Correct Answer: A

QUESTION 8

In an online transaction processing (OLTP) database, a large number of concurrent users are performing small transactions on a specific schema. You observe the statistics and find that total_waits for buffer busy event is increasing significantly. You are in the process of creating another OLTP database with similar workload. What would you do to avoid the wait event in the new database?

- A. Consider setting a larger value for DB_BLOCK_SIZE for the database.
- B. Consider setting a smaller value for DB_BLOCK_SIZE for the database.
- C. Consider setting a larger value for the DB_CACHE_SIZE parameter for the database.
- D. Consider using the DB_BLOCK_BUFFERS parameter instead of the DB_CACHE_SIZE parameter for the database.

Correct Answer: B

QUESTION 9

You modified the Linux memory map and lowered mapped base for Oracle shared libraries to increase the System Global Area (SGA) size. Which three statements are true in this scenario? (Choose three.)

- A. You cannot use the extended buffer cache feature.
- B. You cannot use the Oracle Enterprise Manager (OEM) console.
- C. All the components of SGA can make use of the additional memory allocated to SGA.
- D. The database will not support dynamic SGA and multiple data block sizes.
- E. You may need to retune the SORT_AREA_SIZE parameter because less virtual memory remains available for Program Global Area (PGA).
- F. You must ensure that every Linux shell that spawns an Oracle process must have the same lowered mapped base as that for the Oracle shared libraries.

Correct Answer: CEF

QUESTION 10

Following are the parameters set in your Oracle database instance:

```
USE_INDIRECT_DATA_BUFFERS=true DB_BLOCK_SIZE=8192  
DB_BLOCK_BUFFERS=1048576 SHARED_POOL_SIZE=2831155200
```

You executed the following command:

```
$ ls -al /dev/shm  
total 120  
drwxr-xr-x 1 oracle dba 0 Nov 20 16:29 .  
  
drwxr-xr-x 22 root root 118784 Nov 20 16:25 .. -  
rw-r---1 oracle dba 8589934592 Nov 20 16:30 ora_orcl_458754
```

Which statement is correct in this scenario?

- A. The SGA is available in the shared memory file system.
- B. The shared pool is available in the shared memory file system.
- C. The database buffer cache is available in the shared memory file system.
- D. Every oracle process can have virtual address space more than 4 GB.

Correct Answer: C

QUESTION 11

You have an Oracle Database 10g installation on a Linux machine. The OS user, oracle, is the owner of the Oracle software. oracle is a member of osdba, osoper, and oinstall OS groups. You created another user on the OS and you want this user to access the database as "/ as sysdba".

Which step would you perform to accomplish this task?

- A. Assign the osdba group to the user.
- B. Set the OS_AUTHENT_PREFIX parameter to "".
- C. Set the REMOTE_OS_AUTHENT parameter to TRUE.
- D. Set the REMOTE_LOGIN_PASSWORDFILE parameter to none.

Correct Answer: A

QUESTION 12

Which two methods would you use to change the runlevel on Linux machine? (Choose two.)

- A. Specify the runlevel in the rc#.d directory.
- B. Specify the runlevel in the init command.
- C. Specify the runlevel in the chmod command.
- D. Specify the runlevel as an argument for the inittab file.
- E. Specify the runlevel at startup by using the boot loader program.

Correct Answer: BE

QUESTION 13

You want to change the runlevel of a Linux machine from 4 to 5 dynamically. Which method can you use to accomplish this?

- A. Specify the runlevel in the init command.
- B. Specify the runlevel in the /etc/inittab file.
- C. Specify the runlevel in the /etc/rc.d/rc.local file.
- D. Specify the runlevel while booting using Grand Unified Bootloader (GRUB).

Correct Answer: A

QUESTION 14

The size of the System Global Area (SGA) is 2 GB. You want to ensure that the shmmx parameter is set correctly for each startup of the machine. Which command needs to be run only once to ensure this setting?

- A.

```
cd /proc/sys/vm
echo 2147483648 > shmmx
```
- B.

```
cd /proc/sys/kernel
echo 1073741824 > shmmx
```
- C.

```
cd /proc/sys/kernel
echo 2147483648 > shmmx
```
- D.

```
vi ./skel/.bashrc
kernel, shmmx = 2147483648
```
- E.

```
vi /etc/sysctl.conf
...
kernel.shmmx = 2147483648
```

Correct Answer: E

QUESTION 15

Which three statements are true about Oracle Clustered File System (OCFS)? (Choose three.)

- A. There is no limit on the number of files on OCFS.
- B. You can use OCFS for database files as well as general files.
- C. You can create an OCFS using Logical Volume Manager (LVM).
- D. You must modify the Linux kernel parameters before mounting OCFS.
- E. Standard file system commands, such as mkdir, rmdir, and mv, are available on OCFS.

Correct Answer: ABE

QUESTION 16

In the database instance running on a Linux machine, you receive an out-of-memory error due to the undersizing of shared pool. You observed that the following error was recorded always during peak hours in the trace file that is available in the USER_DUMP_DEST directory:

ORA-04031: unable to allocate 4000 bytes of shared memory On investigation, you found that SGA_MAX_SIZE was larger than the sum of the sizes of all SGA components and you do not have scope to increase it further.

What would be one of the solutions to reduce the probability of getting this error in future?

- A. Implement hugepages in the system.
- B. Increase the swap space in the system.
- C. Set the PRE_PAGE_SGA parameter to TRUE.
- D. Implement Automatic Shared Memory Management.

Correct Answer: D

QUESTION 17

You executed the ipcs -m command to list all the shared memory segments in your Oracle server.

View the Exhibit exhibit1 that shows the output of this command.

```
[root@edtdr6pl root]# ipcs -m
----- Shared Memory Segments -----
key      shmid    owner    perms    bytes    nattch   status
0x4e05c0fb 0        root     666      17408    1
0xbe3bb918 32769    oracle   640      289406976 24
0x00000001 98306    root     600      655360   2
0x00000000 131075    vncuser  600      196608   2      dest
0x00000000 163844    gdm      600      196608   2      dest
0x00000000 196613    vncuser  600      196608   2      dest
0x00000000 229382    vncuser  600      196608   2      dest
0x00000000 262151    vncuser  600      196608   2      dest
0x00000000 294920    vncuser  600      196608   2      dest
0x00000000 327689    vncuser  644      106496   2      dest
0x00000000 425994    vncuser  600      196608   2      dest

[root@edtdr6pl root]# ipcs -m
----- Shared Memory Segments -----
key      shmid    owner    perms    bytes    nattch   status
0x4e05c0fb 0        root     666      17408    1
0x00000001 98306    root     600      655360   2
0x00000000 131075    vncuser  600      196608   2      dest
0x00000000 163844    gdm      600      196608   2      dest
0x00000000 196613    vncuser  600      196608   2      dest
0x00000000 229382    vncuser  600      196608   2      dest
0x00000000 262151    vncuser  600      196608   2      dest
0x00000000 294920    vncuser  600      196608   2      dest
0x00000000 327689    vncuser  644      106496   2      dest
0x00000000 425994    vncuser  600      196608   2      dest
```

Later, you executed the same command to check the shared memory segments.

View the Exhibit exhibit2 that shows the output of this command.

Why is the large shared memory segment not listed in the second Exhibit?


- A. The Oracle database instance is shut down.
- B. The swap space has been increased in the system.

- C. The Oracle database instance is configured in shared server mode.
- D. The large pool size set for the Oracle database instance is reset to zero.

Correct Answer: A

QUESTION 18

View the Exhibit.



```

root@incq101f:~
none /dev/pts devpts gid=5,mode=630 0 0
none /proc proc defaults 0 0
none /dev/shm tmpfs rw,size=8g 0 0
/dev/hda6 swap swap defaults 0 0
/dev/cdrom /mnt/cdrom udf,iso9660 noauto,owner,kudzu 0
/dev/fd0 /mnt/floppy auto noauto,owner,kudzu 0
/dev/hda3 /oracle auto defaults 0
  
```

Examine the highlighted entry in the /etc/fstab file. Which two statements are true about this entry? (Choose two.)

- A. The entry sets the size of the shared memory segment.
- B. The entry creates a shared memory file system on /dev/shm.
- C. The entry enables bigpages for the shared memory file system.
- D. When a database instance is started with the extended buffer cache enabled, then /dev/shm corresponds to the database buffer cache.

Correct Answer: BD

QUESTION 19

To gather the various statistics for the database and the operating system (OS) on a Linux machine, you created a script, snap.sh. You want to collect the statistics every day at 6:30 p.m.

To automate the process, you added the following entry in the crontab file as the oracle user:

```
30 18 *** $ORACLE_BASE/admin/scripts/snap.sh
```

What changes would you have to do to ensure the successful execution of the snap.sh script? (Choose all that apply.)

- A. The user must be assigned the root group.
- B. The user should be listed in the /etc/cron.allow file.
- C. Set the \$PATH shell variable to include the path of the crontab command.
- D. Set the ORACLE_HOME and ORACLE_SID environment variables in the snap.sh script.

Correct Answer: BD

QUESTION 20

You have the following entry in the /etc/fstab file: /dev/hda5 /opt ext3 data=writeback 1 0 What is true about the data=writeback part of the entry with respect to the ext3 file system?

- A. It disables filesystem caching.
- B. The entry resizes the file system.
- C. The entry changes the run level to single-user mode.
- D. The entry specifies a tuning parameter for asynchronous input/output (I/O).
- E. The entry sets the journaling level so that only the changes to the file system metadata are logged.
- F. The entry sets the journaling level so that the changes to the file system data as well as the metadata are logged.

Correct Answer: E

QUESTION 21

You created two databases using Database Configuration Assistant (DBCA). Both the databases use the same set of Oracle executables. Which two statements are correct in this scenario? (Choose two.)

- A. Both the databases cannot share the same listener.
- B. The Oracle Universal Installer (OUI) will be run as the root user.
- C. Two oraenv scripts need to be customized, one for each database.
- D. The oratab file will have a separate entry for each database instance.
- E. Both the databases would have the same Oracle home but different Oracle SIDs.

Correct Answer: DE

QUESTION 22

You upgraded the RAM of your system from 1 GB to 2 GB. The applications running on the system perform memory-intensive operations. What swap space size is recommended for the smooth performance of the system?

- A. 2 * the size of physical memory
- B. 1.5 * the size of physical memory
- C. 0.75 * the size of physical memory
- D. equal to the size of physical memory

Correct Answer: B

QUESTION 23

A non-General Public License (GPL) driver was loaded on a Linux machine. To verify that the module has tainted the kernel, you executed the `cat /proc/sys/kernel/tainted` command and received the following output:

```
[root@edtdr6p1 root]#cat /proc/sys/kernel/tainted 1
```

What do you infer from the output? (Choose all that apply.)

- A. A proprietary module has been loaded.
- B. A module is marked unsupported by the vendor.
- C. All the loaded modules have General Public License (GPL).
- D. A module was force-loaded by using the `insmod -f` command.

Correct Answer: AD

QUESTION 24

Tom has installed the Oracle software and created an Oracle database with the following settings:

```
Oracle home: /oracle/OraHome1  
Instance name: ora_mn1
```

He has created the `ora_sc1` script in the `/etc/rc.d/init.d` directory, which contains the commands to start up and shut down the Oracle services. Tom wants to:

- 1) start up the database as the start priority 10 in run levels 3 and 4
- 2) shut down the database as the stop priority 99

Which set of steps should Tom use to complete the tasks?

- A. 1. Edit the `/etc/oratab` file:
`ora_mn1:/oracle/OraHome1:Y`
2. Ensure that the run levels are specified in the service script:
`chkconfig: 34 10 99`

3. Set the script permissions:
chmod 700 ora_sc1
4. Register the service:
chkconfig --add ora_sc1
- B. 1. Edit the /etc/oratab file:
/oracle/OraHome1 :ora_lm1: Y
2. Ensure that the run levels are specified in the service script:
chkconfig: 99 10 34
3. Set the script permissions:
chmod 700 ora_sc1
- C. Edit the \$ORACLE_HOME/bin/dbstart file:
/oracle/OraHome1 :ora_lm1: Y
- Ensure that the run levels are specified in the service script:
chkconfig: 34 10 99
3. Set the script permissions:
chmod 700 ora_sc1
4. Register the service:
chkconfig --add ora_sc1
- D. 1. Edit the \$ORACLE_HOME/bin/dbstart file:
ora_lm1:/oracle/OraHome1: Y
2. Ensure that the run levels are specified in the service script:
chkconfig: 34 99 10
3. Set the script permissions:
chmod 700 ora_sc1
4. Register the service:
chkconfig -add dbstart

Correct Answer: A

QUESTION 25

Which area in the Linux memory map contains Oracle user processes and background processes?

- A. Page cache area
- B. Shared library area
- C. Application code area
- D. Application memory area

Correct Answer: C

QUESTION 26

You have a Linux machine with an Oracle database instance running in it.

The database users log on and log off from the database instance frequently. The page size for the system is 4 KB and the SGA size is 100 MB. To reduce the page fault, you set the PRE_PAGE_SGA parameter to TRUE for the database instance. After some time you observed that the process startup duration has increased significantly. What could be the reason for this?

- A. The SGA has been locked into physical memory.
- B. Each server process that starts must access every page in SGA.
- C. The session memory for the new connections is allocated from SGA.
- D. The SGA size is adjusted by the Automatic Shared Memory Management feature during every new connection.

Correct Answer: B

QUESTION 27

You find that oracleasm scandisks command is not discovering all your ASM disks. Which tool or utility can provide you details about what SCANDISKS is doing?

- A. strace utility

To Read the [Whole Q&As](#), please purchase the [Complete Version](#) from [Our website](#).

Trying our product !

- ★ **100%** Guaranteed Success
- ★ **100%** Money Back Guarantee
- ★ **365 Days** Free Update
- ★ **Instant Download** After Purchase
- ★ **24x7** Customer Support
- ★ Average **99.9%** Success Rate
- ★ More than **69,000** Satisfied Customers Worldwide
- ★ Multi-Platform capabilities - **Windows, Mac, Android, iPhone, iPod, iPad, Kindle**

Need Help

Please provide as much detail as possible so we can best assist you.

To update a previously submitted ticket:



 One Year Free Update <p>Free update is available within One Year after your purchase. After One Year, you will get 50% discounts for updating. And we are proud to boast a 24/7 efficient Customer Support system via Email.</p>	 Money Back Guarantee <p>To ensure that you are spending on quality products, we provide 100% money back guarantee for 30 days from the date of purchase.</p>	 Security & Privacy <p>We respect customer privacy. We use McAfee's security service to provide you with utmost security for your personal information & peace of mind.</p>
---	---	--

Guarantee & Policy | Privacy & Policy | Terms & Conditions

Any charges made through this site will appear as Global Simulators Limited.

All trademarks are the property of their respective owners.