



300-835^{Q&As}

Automating Cisco Collaboration Solutions (CLAUTO)

Pass Cisco 300-835 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass4itsure.com/300-835.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Cisco
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



**QUESTION 1**

Which two methods can be used to add a custom UI panel to a Webex room device? (Choose two.)

- A. Import an existing panel configuration file by connecting a USB storage drive to the device.
- B. Use xAPI to push a JSON panel configuration to the device.
- C. Create a panel using the device UI Extensions Editor (previously In-Room Controls).
- D. Restore a device backup file present on a PC that contains a panel configuration.
- E. From a T-shell session, use the git command to merge the XML configuration of a panel.

Correct Answer: AE

QUESTION 2

```
import requests

def createUser(apiKey, email, firstName, lastName, displayName):
    url = "https://api.ciscospark.com/v1/people"
    headers = {
        'Authorization': "Bearer " + apiKey,
        'Content-Type': "application/json"
    }
    body = {
        
    }
    response = requests.post(url = url, headers = headers, json=body)
    return response
```

Refer to the exhibit. Which snippet of code does a user with the administrator role use in the missing "body" section to create a new user in a Webex Teams organization?



- A. `"displayName": displayName,
"firstName": firstName,
"lastName": lastName`
- B. `"emails": {
 email
},
"displayName": displayName,
"firstName": firstName,
"lastName": lastName`
- C. `"email": email,
"displayName": displayName,
"firstName": firstName,
"lastName": lastName`
- D. `"emails": [
 email
],
"displayName": displayName,
"firstName": firstName,
"lastName": lastName`

A. Option A

B. Option B

C. Option C

D. Option D

Correct Answer: C

QUESTION 3



```
def my_function(listOfNumbers, b):
    total1 = b
    total2 = 0

    for num in listOfNumbers:
        if num < 5:
            total1 += num
        else:
            total2 += num

    return total1

listOfNums = [4, 3, 9, 1, 7, 2, 9, 0, 6, 8, 5]
a = my_function(listOfNums, 3)
print(a)
```

Refer to the exhibit. Which value of "a" is displayed when the Python code is executed?

- A. 10
- B. 13
- C. 18
- D. 21

Correct Answer: B

QUESTION 4



```
<xsd:element name="associatedDevices" minOccurs="0" maxOccurs="1">
  <xsd:annotation>
    <xsd:documentation>Also known as controlled devices.</xsd:documentation>
  </xsd:annotation>
  <xsd:complexType>
    <xsd:sequence minOccurs="0">
      <xsd:element name="device" type="axlapi:String50" minOccurs="0" maxOccurs="unbounded">
        <xsd:annotation>
          <xsd:documentation>Name of device.</xsd:documentation>
        </xsd:annotation>
      </xsd:element>
    </xsd:sequence>
  </xsd:complexType>
</xsd:element>
<xsd:element name="primaryExtension" minOccurs="0" maxOccurs="1">
  <xsd:annotation>
    <xsd:documentation>Only DNS associated with the associatedDevices of the User can be used as primary extension.</xsd:documentation>
  </xsd:annotation>
  <xsd:complexType>
    <xsd:sequence minOccurs="0">
      <xsd:element name="pattern" type="axlapi:String255" minOccurs="0" maxOccurs="1">
        <xsd:annotation>
          <xsd:documentation>DN or Pattern.</xsd:documentation>
        </xsd:annotation>
      </xsd:element>
      <xsd:element name="routePartitionName" type="axlapi:String50" minOccurs="0" maxOccurs="1">
        <xsd:annotation>
          <xsd:documentation>Route Partition to which the DN is associated.</xsd:documentation>
        </xsd:annotation>
      </xsd:element>
    </xsd:sequence>
  </xsd:complexType>
</xsd:element>
```

Refer to the exhibit. The exhibit shows the XML schema to associate a device for the AddUser operation in AXL. Which XML snippet is correct to associate a device with name "SEP151515151515"?

- A.

```
<associatedDevices>
  <device name="SEP151515151515">
</associatedDevices>
```
- B.

```
<routePartitionName>
  <device>SEP151515151515</device>
</routePartitionName>
```
- C.

```
<routePartitionName>
  <device name="SEP151515151515">
</routePartitionName>
```
- D.

```
<associatedDevices>
  <device>SEP151515151515</device>
</associatedDevices>
```

A. Option A

B. Option B

C. Option C

D. Option D

Correct Answer: D

QUESTION 5



Which statement describe the function of the perfmonCollectCounterData operation used in the Cisco Unified Communications Manager Serviceability Perfmon API?

- A. It returns the Perfmon data for all counters that belong to an object on a particular host.
- B. It collects files from RTMT.
- C. It collects the Perfmon data for all counters that have been added with perfmonAddCounter to the session handle returned from perfmonOpenSession.
- D. It returns the list of available Perfmon objects and counters on a particular host.

Correct Answer: A

QUESTION 6

When the behavior of a Cisco collaboration device is customized, which use case requires an external control system because implementing JavaScript macro does not suffice?

- A. Add a Join Webex meeting button to the touch panel.
- B. Move the shutters up and down.
- C. Trigger a "room-reset" to restore default configurations.
- D. Implement an in-room control panel for speed-dialing.

Correct Answer: D

QUESTION 7

```
1 POST /WBXService/XMLService/LstsummaryUser HTTP/1.1
2 Content-Type: application/xml
3 Host: api.webex.com
4 Content-Length: 974
5
6 <?xml version="1.0" encoding="UTF-8"?>2 <serv:message xmlns:serv="http://www.webex.com/schemas/2002/06/service"
7   xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance">
8   <header>
9     <securityContext>
10      <siteName>apidemoeu</siteName>
11      <webExID>janedoe@example.com</webExID>
12      <sessionTicket>AAABb5LTcGcAABUYA0gAKEgyU</sessionTicket>
13    </securityContext>
14    <action>java:com.webex.service.binding.meeting.LstsummaryUser</action>
15  </header>
16  <body>
17    <method>java:com.webex.service.binding.meeting.LstsummaryUser</method>
18    <bodyContent xsi:type="java:com.webex.service.binding.meeting.LstsummaryUser">
19      <webExId>{{WEBEXID}}</webExId>
20    </bodyContent>
21  </body>
22 </serv:message>
```


Refer to the exhibit. A Webex Meetings XML API HTTP request message with several invalid portions is shown. Which reference points to a line in the exhibit that correctly indicates that this is a LstsummaryUser request?



- A. line 17
- B. line 1
- C. line 18
- D. line 14

Correct Answer: B

QUESTION 8

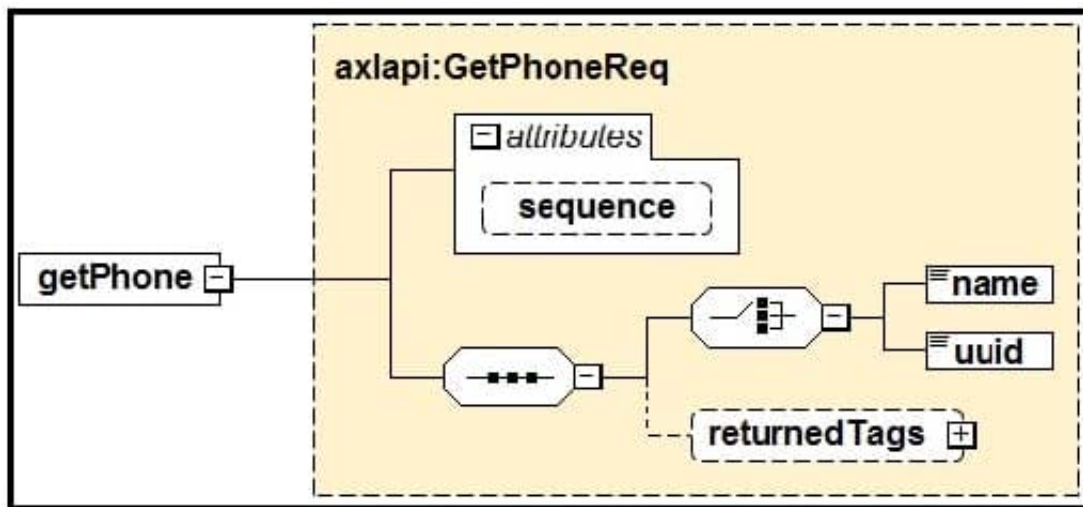

Refer to the exhibit. Based on the schema diagram in the exhibit, which two XML objects are valid AXL request elements? (Choose two.)



- A.

```
<soapenv:Body>
  <ns:getPhone sequence="1">
    <name>BOT209342098</name>
    <returnedtags><model/></returnedtags>
  </ns:getPhone>
</soapenv:Body>
```
- B.

```
<soapenv:Body>
  <ns:getPhone>
    <name>BOT209342098</name>
    <returnedTags><model/></returnedTags>
  </ns:getPhone>
</soapenv:Body>
```
- C.

```
<soapenv:Body>
  <ns:getPhone>
    <name>BOT209342098</name>
    <uuid>{2B1931A2-8FC2-A0C2-7282-B88B5A6356A0}</uuid>
  </ns:getPhone>
</soapenv:Body>
```
- D.

```
<soapenv:Body>
  <ns:getPhone sequence="1">
    <uuid>{2B1931A2-8FC2-A0C2-7282-B88B5A6356A0}</uuid>
  </ns:getPhone>
</soapenv:Body>
```
- E.

```
<soapenv:Body>
  <ns:getPhone sequence="1">
    <name>BOT209342098</name>
    <returnedTags>All</returnedTags>
  </ns:getPhone>
</soapenv:Body>
```

A. Option A

B. Option B

C. Option C

D. Option D

E. Option E

Correct Answer: E

QUESTION 9

What are two keys features of Cisco Unified Communications Manager Serviceability APIs? (Choose two.)



- A. save alarms and events for troubleshooting
- B. connect to serial console on phone hardware
- C. configure firewall rules on phone hardware
- D. scan servers and devices for malware
- E. real-time monitoring of components

Correct Answer: AE

QUESTION 10

DRAG DROP

A small Python script is constructed that creates a Webex Meeting for John Doe scheduled for the current time. Drag and drop the code snippets at the bottom onto the areas of the source code exhibit to create a program. Not all options are used.

Select and Place:



Answer Area

```
import requests, datetime
timestamp = datetime.datetime.now()
startDate = timestamp.strftime('%m/%d/%Y %H:%M:%S')
xml = f'''<message><header><securityContext>
```

```
</securityContext></header>
<body><bodyContent xsi:type="java:com.webex.service.binding.meeting.CreateMeeting">
```

```
<siteName>apidemoeu</siteName>
<webExID>johndoe@example.com</webExID>
<token>AAABbSKM1UYAogAKEkdfUOhBMjU2XOFMR09SSVRTV8=</token>
```

```
<schedule><startDate>(startDate)</startDate></schedule>
</bodyContent></body></message>' ''
print(requests.post('https://api.webex.com/WBXService/XMLService', xml))
```

```
<metaData>
<confName>Sample Meeting</confName><meetingType>105</meetingType>
</metaData>
```

```
<siteName>apidemocu</siteName>
<webExID>johndoe@example.com</webExID>
<sessionTicket>AAABbSKM1UYAogAKEkdfUOhBMjU2XOFMR09SSVRTV8=</sessionTicket>
```

```
<metaData>
<confName>Sample Meeting</confName><meetingType>Training Center</meetingType>
</metaData>
```

Correct Answer:

**Answer Area**

```
import requests, datetime
timestamp = datetime.datetime.now()
startDate = timestamp.strftime('%m/%d/%Y %H:%M:%S')
xml = f'''<message><header><securityContext>
<siteName>apidemoeu</siteName>
<webExID>johndoe@example.com</webExID>
<sessionTicket>AAABbSKM1UYAOgAKEkdfUOhBMjU2XOFMR09SSVRITV8=</sessionTicket>
</securityContext></header>
<body><bodyContent xsi:type="java:com.webex.service.binding.meeting.CreateMeeting">
<metaData>
<confName>Sample Meeting</confName><meetingType>105</meetingType>
</metaData>
<schedule><startDate>{startDate}</startDate></schedule>
</bodyContent></body></message>'''
print(requests.post('https://api.webex.com/WBXService/XMLService', xml))
```

```
<siteName>apidemoeu</siteName>
<webExID>johndoe@example.com</webExID>
<token>AAABbSKM1UYAOgAKEkdfUOhBMjU2XOFMR09SSVRITV8=</token>
```

```
<metaData>
<confName>Sample Meeting</confName><meetingType>Training Center</meetingType>
</metaData>
```

[300-835 VCE Dumps](#)[300-835 Practice Test](#)[300-835 Exam Questions](#)