



MCD-LEVEL1-DELTA^{Q&As}

MuleSoft Certified Developer - Level 1 (Mule 4) DELTA

Pass Mulesoft MCD-LEVEL1-DELTA Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass4itsure.com/mcd-level1-delta.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Mulesoft
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





QUESTION 1


What is not an asset?

- A. Exchange
- B. Template
- C. Example D. Connector

Correct Answer: A

QUESTION 2

Refer to the exhibits.

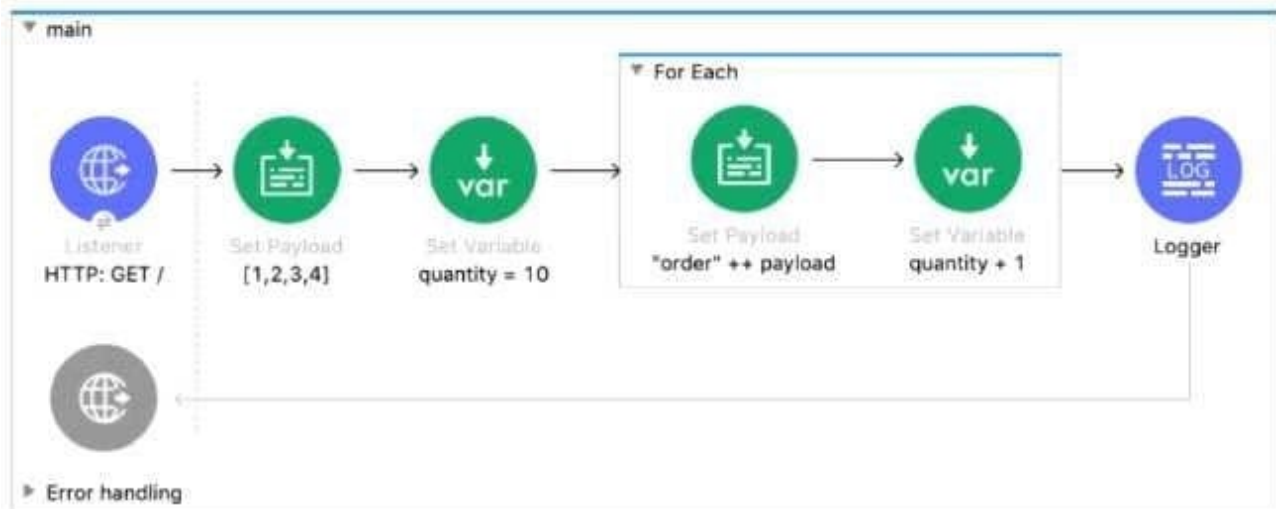

```
<flow name="main" >
  <http:listener doc:name="HTTP: GET /" config-ref="HTTP_listener_config" path="/" allowedMethods="GET"/>
  <set-payload value="#[[1,2,3,4]]" doc:name="[1,2,3,4]" />
  <set-variable value='10' doc:name="quantity = 10" variableName="quantity" />
  <foreach doc:name="For Each" >
    <set-payload value='#["order" ++ payload]' doc:name="'order" ++ payload' />
    <set-variable value="#[vars.quantity + 1]" doc:name="quantity + 1" variableName="quantity" />
  </foreach>
  <logger level="INFO" doc:name="Logger" message='#[[ payload, vars.quantity ]]' />
</flow>
```

What payload and quantity are logged at the end of the main flow?

- A. [[order1, order2, order3, order4], 14]
- B. [[1,2,3,4], 10]
- C. [[1,2,3,4], 14]
- D. [order1order2order3order4, 14]



Correct Answer: C

QUESTION 3

What HTTP method in a RESTful web service is typically used to completely replace an existing resource?

- A. GET
- B. PATCH
- C. POST
- D. PUT

Correct Answer: D

QUESTION 4

Refer to the exhibit. The input array of strings is passed to the batch job, which does NOT do any filtering or aggregating. What payload is logged by the Logger component?



- A. Summary report of processed records
- B. ["Apple", "Banana"]
- C. ["Apptel2", "Bananal2"]
- D. ["Apptel", "Bananal", 2]

Correct Answer: B

QUESTION 5

An On Table Row Database listener retrieves data from a table that contains record_id, an increasing numerical column.



How should the listener be configured so it retrieves new rows at most one time?

- A. Set the target to store the last retrieved record_id value
- B. Set the ObjectStore to store the last retrieved record_id value
- C. Set the target to the record_id column D. Set the watermark column to the record id column

Correct Answer: D

QUESTION 6

What does to the attributes of a Mule event happen in a flow after an outbound HTTP Request is made?

- A. Attributes do not change.
- B. Previous attributes are passed unchanged.
- C. Attributes are replaced with new attributes from the HTTP Request response.
- D. New attributes may be added from the HTTP response headers, but no headers are ever removed.

Correct Answer: C

QUESTION 7

What execution model is used by For Each and Batch Job scopes?

- A. For Each is single-threaded and Batch Job is multi-threaded
- B. Both are single-threaded
- C. Both are multi-threaded
- D. Batch Job is single-threaded and For Each Is multi-threaded

Correct Answer: A

QUESTION 8

What is the correct way to format the decimal 200.1234 as a string to two decimal places?

- A. 200.1234 as string {format: ".0#"}
- B. 200.1234 as string as format: ".0#"
- C. 200.1234 as String {format: ".0#"}
- D. 200.1234 as String as format: ".0#"

Correct Answer: C



QUESTION 9

What payload is returned by a Database SELECT operation that does not match any rows in the database?

- A. false
- B. null
- C. Exception
- D. Empty Array

Correct Answer: D

QUESTION 10

Why would a Mule application use the `#{http.port}` property placeholder for its HTTP Listener port when it is deployed to CloudHub?

- A. Allows CloudHub to automatically change the HTTP port to allow external clients to connect to the HTTP Listener
- B. Allows CloudHub to automatically register the application with API Manager
- C. Allows MuleSoft Support to troubleshoot the application by connecting directly to the HTTP Listener
- D. Allows clients to VPN directly to the application at the Mule application's configured HTTP port

Correct Answer: A

QUESTION 11

Refer to the exhibits.



```
##RAML 1.0
title: ACME Order API
version: 1.0
```

```
/order:
  post:
    body:
      application/xml:
        example: |
          <order oid="1001">
            <customerName>Annie Point
            </customerName>
            <itemName>Electric Standing Desk
            </itemName>
            <cost>300.00</cost>
          </order>
```

The screenshot shows a REST client interface with the following details:

- Request URL: `http://localhost:8081/api/order`
- Method: `POST`
- Body content type: `multipart/mixed`
- Editor view: `Raw input`
- Response: `415 Unsupported Media Type` (4097.00 ms)
- Response body: `{ "message": "Unsupported media type" }`


The web client sends a POST request to the ACME Order API with an XML payload. An error is returned. What should be changed in the request so that a success response code is returned to the web client?

- A. Set a request header with the name Content-Type to a value of `application/octet-stream`
- B. Set a request header with the name Content-Type to a value of `application/xml`
- C. Set a response header with the name Content-Type to a value of `application/xml`
- D. Set a response header with the name Content-Type to a value of `application/octet-stream`

Correct Answer: B

QUESTION 12

Refer to the exhibit.

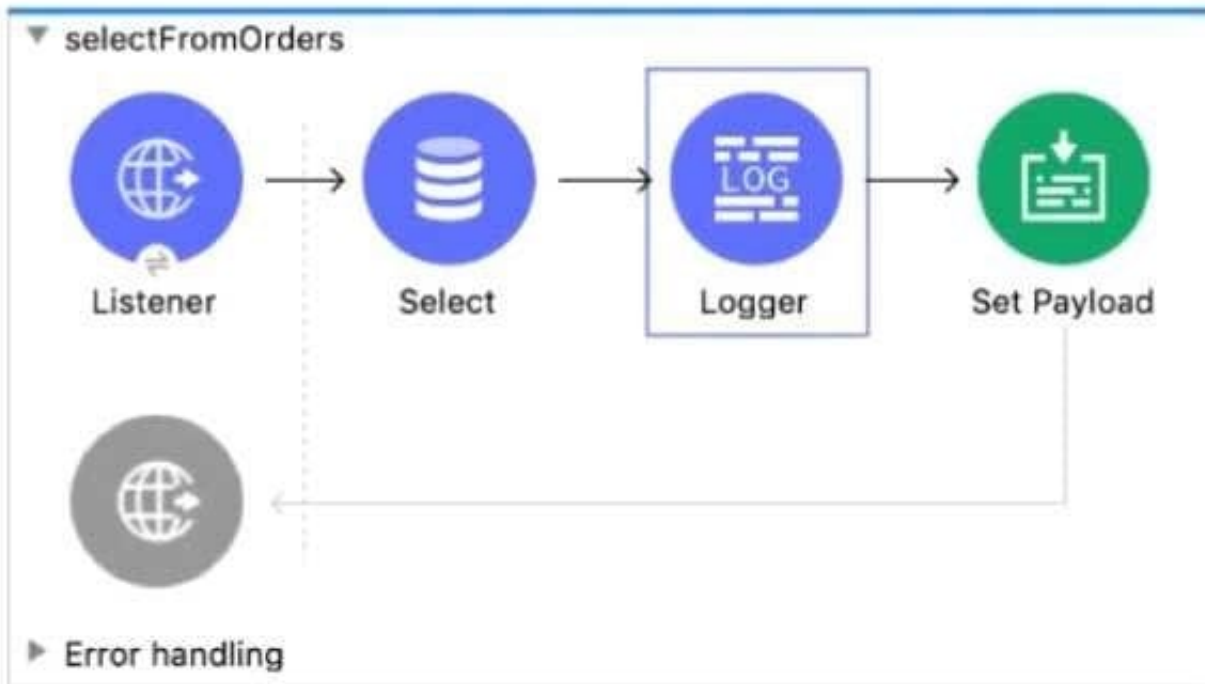

Message Flow Global Elements Configuration XML

Logger x Problems Console

There are no errors.

Display Name: Logger

Generic

Message: `#[typeOf(payload)]`

Level: INFO (Default)

Category:

The Database Select operation returns five rows from a database. What is logged by the Logger component?

- A. "Array"
- B. "Object"
- C. "LinkedHashMap"
- D. "CaseInsensitiveHashMap"

Correct Answer: C

QUESTION 13



What are the features of CloudHub Fabric?

- A. Non-persistent queue
- B. Horizontal Scaling
- C. VPN Mock Services
- D. None of these

Correct Answer: B

QUESTION 14

Refer to the exhibit.



In the execution of the Scatter_Gather, the flow1 route completes after 10 seconds and the flow2 route completes after 20 seconds.


How many seconds does it take for the Scatter_Gather to complete?

- A. 0
- B. 10
- C. 20 D. 30

Correct Answer: C

QUESTION 15

Refer to the exhibit.

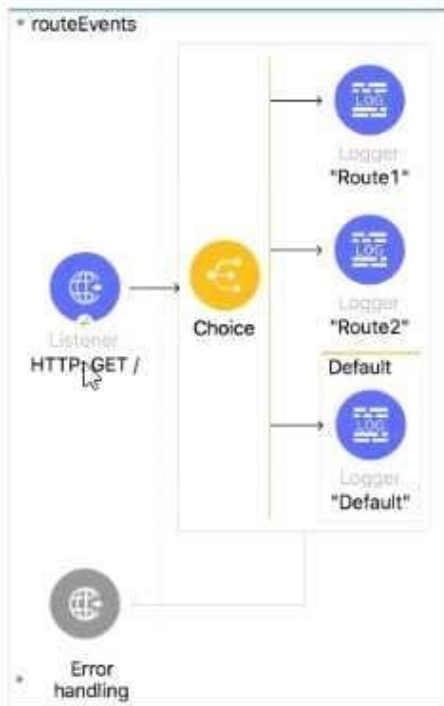

```
<flow name="routeEvents" >
  <http:listener doc:name="HTTP: GET /" config-ref="HTTP_listener_config"
    path="/" />
  <choice doc:name="Choice" >
    <when expression="true" >
      <logger level="INFO" doc:name="Route1" message="Route1"/>
    </when>
    <when expression="true" >
      <logger level="INFO" doc:name="Route2" message="Route2"/>
    </when>
    <otherwise >
      <logger level="INFO" doc:name="Default" message="Default"/>
    </otherwise>
  </choice>
</flow>
```

All three of the condition for the Choice router are true. What log messages are written?

- A. Route 1
- B. Route2
- C. Route1, Route2
- D. Route1, Route2, Default

Correct Answer: A

[MCD-LEVEL1-DELTA Practice Test](#)

[MCD-LEVEL1-DELTA Exam Questions](#)

[MCD-LEVEL1-DELTA Braindumps](#)