



JN0-682^{Q&As}

Data Center Professional (JNCIP-DC)

Pass Juniper JN0-682 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass4itsure.com/jn0-682.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Juniper
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers



**QUESTION 1**

You are designing an EBGP IP fabric for a multi-side data center. In this scenario, which two statements are true? (Choose two.)

- A. The same AS number should be used on all devices across all data centers.
- B. Different AS numbers should be used on all devices.
- C. Private AS numbers can be used.
- D. Public AS numbers must be used

Correct Answer: BC

QUESTION 2

You work in a data center where VMs and hosts are frequently moved. Your design needs to eliminate inefficient traffic flows.


In this scenario, which two solutions will satisfy this requirement? (Choose two.)

- A. VXLAN
- B. EVPN
- C. VMTO
- D. VPLS

Correct Answer: BC

QUESTION 3

Devices spine1 and spine have been configured as distributed Layer 3 gateways in the VXLAN topology, and devices leaf1 and leaf3 have been configured as layer 2 gateways. Device host must be able to communicate with device host?

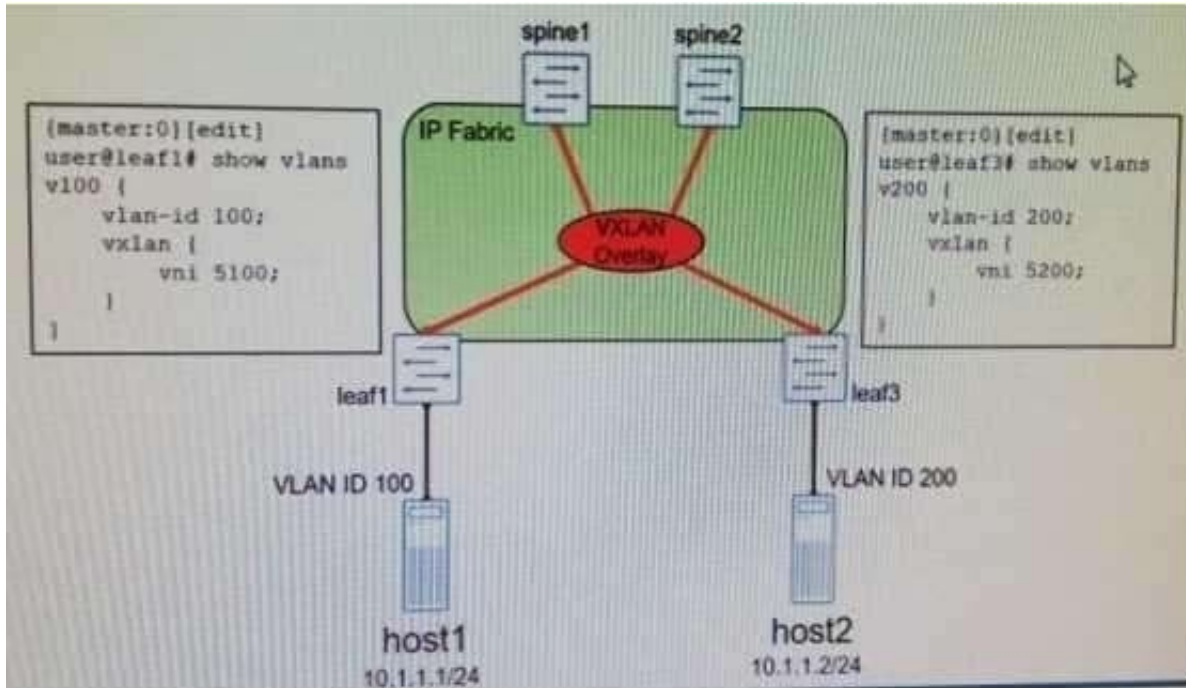

Which two statements are true? (Choose two.)

- A. An IRB interface must be configured on device leaf1 and leaf2.
- B. An IRB interface must be configured on devices spine1 and spine2.
- C. Traffic from host1 to host2 will transmit the VXLAN tunnel from leaf1 to leaf3.
- D. Traffic from host1 to host will transit a VXLAN tunnel to spine or spine2 then a VXLAN from spine1 or spine2 to leaf 3.

Correct Answer: BC

QUESTION 4

You are troubleshooting an L3VPN that is part of an EVPN/MPLS DCI. You notice that the EVPN overlay BGP session toward 10.29.50.4 is unable to establish.



```
VPN.inet.0: 15 destinations, 16 routes (15 active,
0 holddown, 1 hidden)
 10.29.50.4/32 (2 entries, 1 announced)
   Import Accepted
   Route Distinguisher: 65000:12345
   VPN Label: 16
   Nexthop: 192.168.5.5
   MED: 3
   Localpref: 100
   AS path: I
   Communities: target:65000:12345 rte-
type:0.0.0.0:1:0
```

Why is the BGP session failing to establish?

- A. The route-distinguisher value on the local PE is incorrect
- B. There is no route for 192.168.5.5 an VPN net 0.
- C. There is no route for 192.168.5.5. in inet 3.
- D. The vrf-table label value is not configured in the remote PE.

Correct Answer: C

QUESTION 5

You are asked to design a deployment plan for a large number of QFX Series switches using ZTP. The ZTP deployment plan must ensure all switches are configured with their designated configuration file.

Which DHCP option and subscription combination would be used to accomplish this task?

- A. DHCP option 43 a suboption of 00.
- B. DHCP option 66 a suboption of 01.
- C. DHCP option 66 a suboption of 00.
- D. DHCP option 43 a suboption of 01.

Correct Answer: D